

# The markovchain Package: A Package for Easily Handling Discrete Markov Chains in R

Giorgio Alfredo Spedicato, Tae Seung Kang, Sai Bhargav Yalamanchi and Deepak Yadav

---

## Abstract

The **markovchain** package aims to fill a gap within the R framework providing S4 classes and methods for easily handling discrete time Markov chains, homogeneous and simple inhomogeneous ones as well as continuous time Markov chains. The S4 classes for handling and analysing discrete and continuous time Markov chains are presented, as well as functions and method for performing probabilistic and statistical analysis. Finally, some examples in which the package's functions are applied to Economics, Finance and Natural Sciences topics are shown.

*Keywords:* discrete time Markov chains, continuous time Markov chains, transition matrices, communicating classes, periodicity, first passage time, stationary distributions..

---

## 1. Introduction

Markov chains represent a class of stochastic processes of great interest for the wide spectrum of practical applications. In particular, discrete time Markov chains (DTMC) permit to model the transition probabilities between discrete states by the aid of matrices. Various R packages deal with models that are based on Markov chains:

- **msm** ([Jackson 2011](#)) handles Multi-State Models for panel data;
- **mcmcR** ([Geyer and Johnson 2013](#)) implements Monte Carlo Markov Chain approach;
- **hmm** ([Himmelman and www.linhi.com 2010](#)) fits hidden Markov models with covariates;
- **mstate** fits Multi-State Models based on Markov chains for survival analysis ([de Wreede, Fiocco, and Putter 2011](#)).

Nevertheless, the R statistical environment ([R Core Team 2013](#)) seems to lack a simple package that coherently defines S4 classes for discrete Markov chains and allows to perform probabilistic analysis, statistical inference and applications. For the sake of completeness, **markovchain** is the second package specifically dedicated to DTMC analysis, being **DTMCPack** ([Nicholson 2013](#)) the first one. Notwithstanding, **markovchain** package ([Spedicato 2016](#)) aims to offer more flexibility in handling DTMC than other existing solutions, providing S4 classes for both homogeneous and non-homogeneous Markov chains as well as methods suited to perform statistical and probabilistic analysis.

The **markovchain** package depends on the following R packages: **expm** ([Goulet, Dutang,](#)

Maechler, Firth, Shapira, Stadelmann, and [expm-developers@lists.R-forge.R-project.org](mailto:expm-developers@lists.R-forge.R-project.org) 2013) to perform efficient matrices powers; **igraph** (Csardi and Nepusz 2006) to perform pretty plotting of **markovchain** objects and **matlab** (Roebuck 2011), that contains functions for matrix management and calculations that emulate those within MATLAB environment. Moreover, other scientific softwares provide functions specifically designed to analyze DTMC, as Mathematica 9 (Wolfram Research 2013b).

The paper is structured as follows: Section 2 briefly reviews mathematics and definitions regarding DTMC, Section 3 discusses how to handle and manage Markov chain objects within the package, Section 4 and Section 5 show how to perform probabilistic and statistical modelling, while Section 6 presents some applied examples from various fields analyzed by means of the **markovchain** package.

## 2. Review of core mathematical concepts

### 2.1. General Definitions

A DTMC is a sequence of random variables  $X_1, X_2, \dots, X_n, \dots$  characterized by the Markov property (also known as memoryless property, see Equation 1). The Markov property states that the distribution of the forthcoming state  $X_{n+1}$  depends only on the current state  $X_n$  and doesn't depend on the previous ones  $X_{n-1}, X_{n-2}, \dots, X_1$ .

$$Pr(X_{n+1} = x_{n+1} | X_1 = x_1, X_2 = x_2, \dots, X_n = x_n) = Pr(X_{n+1} = x_{n+1} | X_n = x_n). \quad (1)$$

The set of possible states  $S = \{s_1, s_2, \dots, s_r\}$  of  $X_n$  can be finite or countable and it is named the state space of the chain.

The chain moves from one state to another (this change is named either 'transition' or 'step') and the probability  $p_{ij}$  to move from state  $s_i$  to state  $s_j$  in one step is named transition probability:

$$p_{ij} = Pr(X_1 = s_j | X_0 = s_i). \quad (2)$$

The probability of moving from state  $i$  to  $j$  in  $n$  steps is denoted by  $p_{ij}^{(n)} = Pr(X_n = s_j | X_0 = s_i)$ .

A DTMC is called time-homogeneous if the property shown in Equation 3 holds. Time homogeneity implies no change in the underlying transition probabilities as time goes on.

$$Pr(X_{n+1} = s_j | X_n = s_i) = Pr(X_n = s_j | X_{n-1} = s_i). \quad (3)$$

If the Markov chain is time-homogeneous, then  $p_{ij} = Pr(X_{k+1} = s_j | X_k = s_i)$  and  $p_{ij}^{(n)} = Pr(X_{n+k} = s_j | X_k = s_i)$ , where  $k > 0$ .

The probability distribution of transitions from one state to another can be represented into a transition matrix  $P = (p_{ij})_{i,j}$ , where each element of position  $(i, j)$  represents the transition probability  $p_{ij}$ . E.g., if  $r = 3$  the transition matrix  $P$  is shown in Equation 4

$$P = \begin{bmatrix} p_{11} & p_{12} & p_{13} \\ p_{21} & p_{22} & p_{23} \\ p_{31} & p_{32} & p_{33} \end{bmatrix}. \quad (4)$$

The distribution over the states can be written in the form of a stochastic row vector  $x$  (the term stochastic means that  $\sum_i x_i = 1, x_i \geq 0$ ): e.g., if the current state of  $x$  is  $s_2$ ,  $x = (0 \ 1 \ 0)$ . As a consequence, the relation between  $x^{(1)}$  and  $x^{(0)}$  is  $x^{(1)} = x^{(0)}P$  and, recursively, we get  $x^{(2)} = x^{(0)}P^2$  and  $x^{(n)} = x^{(0)}P^n$ ,  $n > 0$ .

DTMC are explained in most theory books on stochastic processes, see [Brémaud \(1999\)](#) and [Dobrow \(2016\)](#) for example. Valuable references online available are: [Konstantopoulos \(2009\)](#), [Snell \(1999\)](#) and [Bard \(2000\)](#).

## 2.2. Properties and classification of states

A state  $s_j$  is said accessible from state  $s_i$  (written  $s_i \rightarrow s_j$ ) if a system started in state  $s_i$  has a positive probability to reach the state  $s_j$  at a certain point, i.e.,  $\exists n > 0 : p_{ij}^n > 0$ . If both  $s_i \rightarrow s_j$  and  $s_j \rightarrow s_i$ , then  $s_i$  and  $s_j$  are said to communicate.

A communicating class is defined to be a set of states that communicate. A DTMC can be composed by one or more communicating classes. If the DTMC is composed by only one communicating class (i.e., if all states in the chain communicate), then it is said irreducible. A communicating class is said to be closed if no states outside of the class can be reached from any state inside it.

If  $p_{ii} = 1$ ,  $s_i$  is defined as absorbing state: an absorbing state corresponds to a closed communicating class composed by one state only.

The canonic form of a DTMC transition matrix is a matrix having a block form, where the closed communicating classes are shown at the beginning of the diagonal matrix.

A state  $s_i$  has period  $k_i$  if any return to state  $s_i$  must occur in multiplies of  $k_i$  steps, that is  $k_i = \gcd\{n : \Pr(X_n = s_i | X_0 = s_i) > 0\}$ , where  $\gcd$  is the greatest common divisor. If  $k_i = 1$  the state  $s_i$  is said to be aperiodic, else if  $k_i > 1$  the state  $s_i$  is periodic with period  $k_i$ . Loosely speaking,  $s_i$  is periodic if it can only return to itself after a fixed number of transitions  $k_i > 1$  (or multiple of  $k_i$ ), else it is aperiodic.

If states  $s_i$  and  $s_j$  belong to the same communicating class, then they have the same period  $k_i$ . As a consequence, each of the states of an irreducible DTMC share the same periodicity. This periodicity is also considered the DTMC periodicity. It is possible to classify states according to their periodicity. Let  $T^{x \rightarrow x}$  is the number of periods to go back to state  $x$  knowing that the chain starts in  $x$ .

- A state  $x$  is recurrent if  $P(T^{x \rightarrow x} < +\infty) = 1$  (equivalently  $P(T^{x \rightarrow x} = +\infty) = 0$ ). In addition:
  1. A state  $x$  is null recurrent if in addition  $E(T^{x \rightarrow x}) = +\infty$ .
  2. A state  $x$  is positive recurrent if in addition  $E(T^{x \rightarrow x}) < +\infty$ .
  3. A state  $x$  is absorbing if in addition  $P(T^{x \rightarrow x} = 1) = 1$ .
- A state  $x$  is transient if  $P(T^{x \rightarrow x} < +\infty) < 1$  (equivalently  $P(T^{x \rightarrow x} = +\infty) > 0$ ).

It is possible to analyze the timing to reach a certain state. The first passage time from state  $s_i$  to state  $s_j$  is the number  $T_{ij}$  of steps taken by the chain until it arrives for the first time to state  $s_j$ , given that  $X_0 = s_i$ . The probability distribution of  $T_{ij}$  is defined by Equation 5

$$h_{ij}^{(n)} = \Pr(T_{ij} = n) = \Pr(X_n = s_j, X_{n-1} \neq s_j, \dots, X_1 \neq s_j | X_0 = s_i) \quad (5)$$

and can be found recursively using Equation 6, given that  $h_{ij}^{(n)} = p_{ij}$ .

$$h_{ij}^{(n)} = \sum_{k \in S - \{s_j\}} p_{ik} h_{kj}^{(n-1)}. \quad (6)$$

If in the definition of the first passage time we let  $s_i = s_j$ , we obtain the first return time  $T_i = \inf\{n \geq 1 : X_n = s_i | X_0 = s_i\}$ . A state  $s_i$  is said to be recurrent if it is visited infinitely often, i.e.,  $Pr(T_i < +\infty | X_0 = s_i) = 1$ . On the opposite,  $s_i$  is called transient if there is a positive probability that the chain will never return to  $s_i$ , i.e.,  $Pr(T_i = +\infty | X_0 = s_i) > 0$ .

Given a time homogeneous Markov chain with transition matrix  $P$ , a stationary distribution  $z$  is a stochastic row vector such that  $z = z \cdot P$ , where  $0 \leq z_j \leq 1 \forall j$  and  $\sum_j z_j = 1$ .

If a DTMC  $\{X_n\}$  is irreducible and aperiodic, then it has a limit distribution and this distribution is stationary. As a consequence, if  $P$  is the  $k \times k$  transition matrix of the chain and  $z = (z_1, \dots, z_k)$  is the eigenvector of  $P$  such that  $\sum_{i=1}^k z_i = 1$ , then we get

$$\lim_{n \rightarrow \infty} P^n = Z, \quad (7)$$

where  $Z$  is the matrix having all rows equal to  $z$ . The stationary distribution of  $\{X_n\}$  is represented by  $z$ .

### 2.3. A short example

Consider the following numerical example. Suppose we have a DTMC with a set of 3 possible states  $S = \{s_1, s_2, s_3\}$ . Let the transition matrix be

$$P = \begin{bmatrix} 0.5 & 0.2 & 0.3 \\ 0.15 & 0.45 & 0.4 \\ 0.25 & 0.35 & 0.4 \end{bmatrix}. \quad (8)$$

In  $P$ ,  $p_{11} = 0.5$  is the probability that  $X_1 = s_1$  given that we observed  $X_0 = s_1$  is 0.5, and so on. It is easy to see that the chain is irreducible since all the states communicate (it is made by one communicating class only).

Suppose that the current state of the chain is  $X_0 = s_2$ , i.e.,  $x^{(0)} = (0 \ 1 \ 0)$ , then the probability distribution of states after 1 and 2 steps can be computed as shown in Equations 9 and 10.

$$x^{(1)} = (0 \ 1 \ 0) \begin{bmatrix} 0.5 & 0.2 & 0.3 \\ 0.15 & 0.45 & 0.4 \\ 0.25 & 0.35 & 0.4 \end{bmatrix} = (0.15 \ 0.45 \ 0.4). \quad (9)$$

$$x^{(n)} = x^{(n-1)} P \rightarrow (0.15 \ 0.45 \ 0.4) \begin{bmatrix} 0.5 & 0.2 & 0.3 \\ 0.15 & 0.45 & 0.4 \\ 0.25 & 0.35 & 0.4 \end{bmatrix} = (0.2425 \ 0.3725 \ 0.385). \quad (10)$$

If, f.e., we are interested in the probability of reaching the state  $s_3$  in two steps, then  $Pr(X_2 = s_3 | X_0 = s_2) = 0.385$ .

### 3. The structure of the package

#### 3.1. Creating markovchain objects

The package is loaded within the R command line as follows:

```
R> library("markovchain")
```

The `markovchain` and `markovchainList` S4 classes ([Chambers 2008](#)) are defined within the **markovchain** package as displayed:

```
Class "markovchain" [package "markovchain"]
```

Slots:

```
Name:          states          byrow transitionMatrix
Class:         character       logical          matrix
```

```
Name:          name
Class:         character
```

```
Class "markovchainList" [package "markovchain"]
```

Slots:

```
Name: markovchains      name
Class:      list      character
```

The first class has been designed to handle homogeneous Markov chain processes, while the latter (which is itself a list of `markovchain` objects) has been designed to handle non-homogeneous Markov chains processes.

Any element of `markovchain` class is comprised by following slots:

1. **states**: a character vector, listing the states for which transition probabilities are defined.
2. **byrow**: a logical element, indicating whether transition probabilities are shown by row or by column.
3. **transitionMatrix**: the probabilities of the transition matrix.
4. **name**: optional character element to name the DTMC.

The `markovchainList` objects are defined by following slots:

1. **markovchains**: a list of `markovchain` objects.
2. **name**: optional character element to name the DTMC.

The `markovchain` objects can be created either in a long way, as the following code shows

```
R> weatherStates <- c("sunny", "cloudy", "rain")
R> byRow <- TRUE
R> weatherMatrix <- matrix(data = c(0.70, 0.2, 0.1,
+                               0.3, 0.4, 0.3,
+                               0.2, 0.45, 0.35), byrow = byRow, nrow = 3,
+                               dimnames = list(weatherStates, weatherStates))
R> mcWeather <- new("markovchain", states = weatherStates, byrow = byRow,
+                   transitionMatrix = weatherMatrix, name = "Weather")
```

or in a shorter way, displayed below

```
R> mcWeather <- new("markovchain", states = c("sunny", "cloudy", "rain"),
+                   transitionMatrix = matrix(data = c(0.70, 0.2, 0.1,
+                               0.3, 0.4, 0.3,
+                               0.2, 0.45, 0.35), byrow = byRow, nrow = 3),
+                   name = "Weather")
```

When `new("markovchain")` is called alone, a default Markov chain is created.

```
R> defaultMc <- new("markovchain")
```

The quicker way to create `markovchain` objects is made possible thanks to the implemented `initialize` S4 method that checks that:

- the `transitionMatrix` to be a transition matrix, i.e., all entries to be probabilities and either all rows or all columns to sum up to one.
- the columns and rows names of `transitionMatrix` to be defined and to coincide with `states` vector slot.

The `markovchain` objects can be collected in a list within `markovchainList` S4 objects as following example shows.

```
R> mcList <- new("markovchainList", markovchains = list(mcWeather, defaultMc),
+                   name = "A list of Markov chains")
```

### 3.2. Handling markovchain objects

Table 1 lists which methods handle and manipulate `markovchain` objects.

The examples that follow shows how operations on `markovchain` objects can be easily performed. For example, using the previously defined matrix we can find what is the probability distribution of expected weather states in two and seven days, given the actual state to be cloudy.

Method	Purpose
<code>*</code>	Direct multiplication for transition matrices.
<code>[</code>	Direct access to the elements of the transition matrix.
<code>==</code>	Equality operator between two transition matrices.
<code>as</code>	Operator to convert <code>markovchain</code> objects into <code>data.frame</code> and <code>table</code> object.
<code>dim</code>	Dimension of the transition matrix.
<code>names</code>	Equal to <code>states</code> .
<code>names&lt;-</code>	Change the <code>states</code> name.
<code>name</code>	Get the name of <code>markovchain</code> object.
<code>name&lt;-</code>	Change the name of <code>markovchain</code> object.
<code>plot</code>	<code>plot</code> method for <code>markovchain</code> objects.
<code>print</code>	<code>print</code> method for <code>markovchain</code> objects.
<code>show</code>	<code>show</code> method for <code>markovchain</code> objects.
<code>states</code>	Name of the transition states.
<code>t</code>	Transposition operator (which switches byrow slot value and modifies the transition matrix coherently).

Table 1: **markovchain** methods for handling `markovchain` objects.

```
R> initialState <- c(0, 1, 0)
R> after2Days <- initialState * (mcWeather * mcWeather)
R> after7Days <- initialState * (mcWeather ^ 7)
R> after2Days
```

```
      sunny cloudy rain
[1,]  0.39  0.355 0.255
```

```
R> round(after7Days, 3)
```

```
      sunny cloudy rain
[1,] 0.462  0.319 0.219
```

A similar answer could have been obtained defining the vector of probabilities as a column vector. A column - defined probability matrix could be set up either creating a new matrix or transposing an existing `markovchain` object thanks to the `t` method.

```
R> initialState <- c(0, 1, 0)
R> after2Days <- (t(mcWeather) * t(mcWeather)) * initialState
R> after7Days <- (t(mcWeather) ^ 7) * initialState
R> after2Days
```

```
      [,1]
sunny  0.390
cloudy 0.355
rain    0.255
```

```
R> round(after7Days, 3)
```

```
      [,1]
sunny 0.462
cloudy 0.319
rain   0.219
```

The initial state vector previously shown can not necessarily be a probability vector, as the code that follows shows:

```
R> fvals<-function(mchain,initialstate,n) {
+   out<-data.frame()
+   names(initialstate)<-names(mchain)
+   for (i in 0:n)
+   {
+     iteration<-initialstate*mchain^(i)
+     out<-rbind(out,iteration)
+   }
+   out<-cbind(out, i=seq(0,n))
+   out<-out[,c(4,1:3)]
+   return(out)
+ }
R> fvals(mchain=mcWeather,initialstate=c(90,5,5),n=4)
```

```
  i    sunny    cloudy    rain
1 0 90.00000  5.00000  5.00000
2 1 65.50000 22.25000 12.25000
3 2 54.97500 27.51250 17.51250
4 3 50.23875 29.88063 19.88062
5 4 48.10744 30.94628 20.94628
```

Basic methods have been defined for `markovchain` objects to quickly get states and transition matrix dimension.

```
R> states(mcWeather)
```

```
[1] "sunny" "cloudy" "rain"
```

```
R> names(mcWeather)
```

```
[1] "sunny" "cloudy" "rain"
```

```
R> dim(mcWeather)
```

```
[1] 3
```

Methods are available to set and get the name of `markovchain` object.

```
R> name(mcWeather)
```

```
[1] "Weather"
```

```
R> name(mcWeather) <- "New Name"
```

```
R> name(mcWeather)
```

```
[1] "New Name"
```

A direct access to transition probabilities is provided both by `transitionProbability` method and `"["` method.

```
R> transitionProbability(mcWeather, "cloudy", "rain")
```

```
[1] 0.3
```

```
R> mcWeather[2,3]
```

```
[1] 0.3
```

The transition matrix of a `markovchain` object can be displayed using `print` or `show` methods (the latter being less laconic). Similarly, the underlying transition probability diagram can be plotted by the use of `plot` method (as shown in Figure 1) which is based on **igraph** package (Csardi and Nepusz 2006). `plot` method for `markovchain` objects is a wrapper of `plot.igraph` for `igraph` S4 objects defined within the **igraph** package. Additional parameters can be passed to `plot` function to control the network graph layout. There are also **diagram** and **DiagrammeR** ways available for plotting as shown in Figure 2.

```
R> print(mcWeather)
```

```
      sunny cloudy rain
sunny   0.7   0.20 0.10
cloudy   0.3   0.40 0.30
rain     0.2   0.45 0.35
```

```
R> show(mcWeather)
```

```
New Name
```

```
A 3 - dimensional discrete Markov Chain defined by the following states:
```

```
sunny, cloudy, rain
```

```
The transition matrix (by rows) is defined as follows:
```

```
      sunny cloudy rain
sunny   0.7   0.20 0.10
cloudy   0.3   0.40 0.30
rain     0.2   0.45 0.35
```

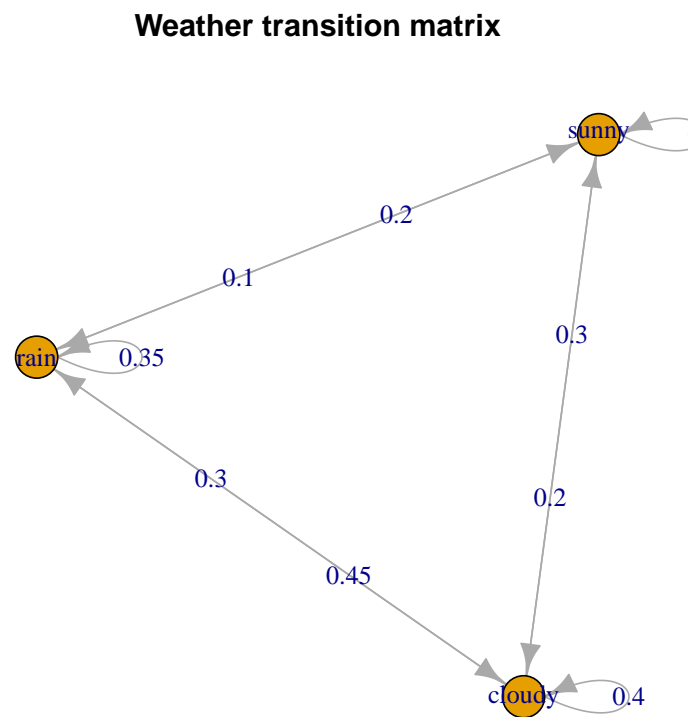


Figure 1: Weather example. Markov chain plot.

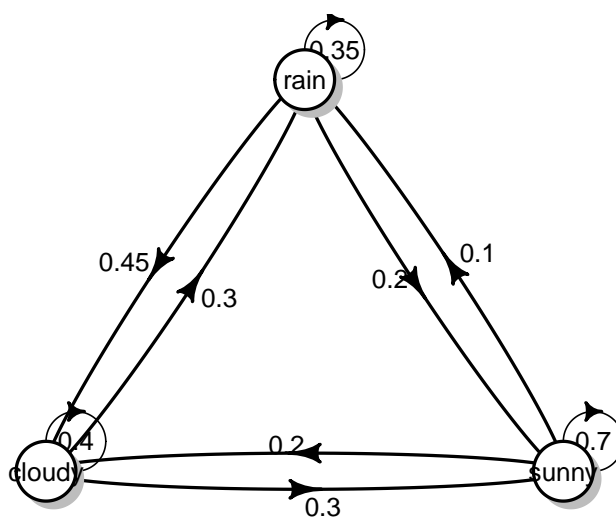


Figure 2: Weather example. Markov chain plot with diagram. `plot(mcWeather, package="diagram", box.size = 0.04)`

Import and export from some specific classes is possible, as shown in Figure 3 and in the following code.

```
R> mcDf <- as(mcWeather, "data.frame")
R> mcNew <- as(mcDf, "markovchain")
R> mcDf

      t0      t1 prob
1 sunny sunny 0.70
2 sunny cloudy 0.20
3 sunny rain 0.10
4 cloudy sunny 0.30
5 cloudy cloudy 0.40
6 cloudy rain 0.30
7 rain sunny 0.20
8 rain cloudy 0.45
9 rain rain 0.35

R> mcIgraph <- as(mcWeather, "igraph")

R> library(msm)
R> data(cav)
R> Q <- rbind ( c(0, 0.25, 0, 0.25),
+               c(0.166, 0, 0.166, 0.166),
+               c(0, 0.25, 0, 0.25),
+               c(0, 0, 0, 0) )
R> cavmsm <- msm(state ~ years, subject = PTNUM, data = cav, qmatrix = Q, death = 4)
R> msmMc <- as(cavmsm, "markovchain")
R> msmMc
```

Unnamed Markov chain

A 4 - dimensional discrete Markov Chain defined by the following states:

State 1, State 2, State 3, State 4

The transition matrix (by rows) is defined as follows:

	State 1	State 2	State 3	State 4
State 1	0.853958721	0.08836953	0.01475543	0.04291632
State 2	0.155576908	0.56663284	0.20599563	0.07179462
State 3	0.009903994	0.07853691	0.65965727	0.25190183
State 4	0.000000000	0.00000000	0.00000000	1.00000000

```
R> library(etm)
R> data(sir.cont)
R> sir.cont <- sir.cont[order(sir.cont$id, sir.cont$time), ]
R> for (i in 2:nrow(sir.cont)) {
+   if (sir.cont$id[i]==sir.cont$id[i-1]) {
```

```

+      if (sir.cont$time[i]==sir.cont$time[i-1]) {
+        sir.cont$time[i-1] <- sir.cont$time[i-1] - 0.5
+      }
+    }
+  }
R> tra <- matrix(ncol=3,nrow=3,FALSE)
R> tra[1, 2:3] <- TRUE
R> tra[2, c(1, 3)] <- TRUE
R> tr.prob <- etm(sir.cont, c("0", "1", "2"), tra, "cens", 1)
R> tr.prob

```

Multistate model with 2 transient state(s)  
and 1 absorbing state(s)

Possible transitions:

```

from to
  0  1
  0  2
  1  0
  1  2

```

Estimate of P(1, 183)

```

  0 1 2
0 0 0 1
1 0 0 1
2 0 0 1

```

Estimate of cov(P(1, 183))

	0	0	1	0	2	0	0	1	1	1	2	1		0	2		1	2	2	2
0 0	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
1 0	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
2 0	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
0 1	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
1 1	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
2 1	0	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0.000000e+00	0.000000e+00	0	0	
0 2	0	0	0	0	0	0	0	0	0	-2.864030e-20	-1.126554e-19	0	0	0	0	-2.864030e-20	-1.126554e-19	0	0	
1 2	0	0	0	0	0	0	0	0	0	-4.785736e-20	2.710505e-19	0	0	0	0	-4.785736e-20	2.710505e-19	0	0	
2 2	0	0	0	0	0	0	0	0	0	0.000000e+00	0.000000e+00	0	0	0	0	0.000000e+00	0.000000e+00	0	0	

```

R> etm2mc<-as(tr.prob, "markovchain")

```

```

R> etm2mc

```

Unnamed Markov chain

A 3 - dimensional discrete Markov Chain defined by the following states:

0, 1, 2

The transition matrix (by rows) is defined as follows:

	0	1	2
--	---	---	---

### Import – Export from and to markovchain objects

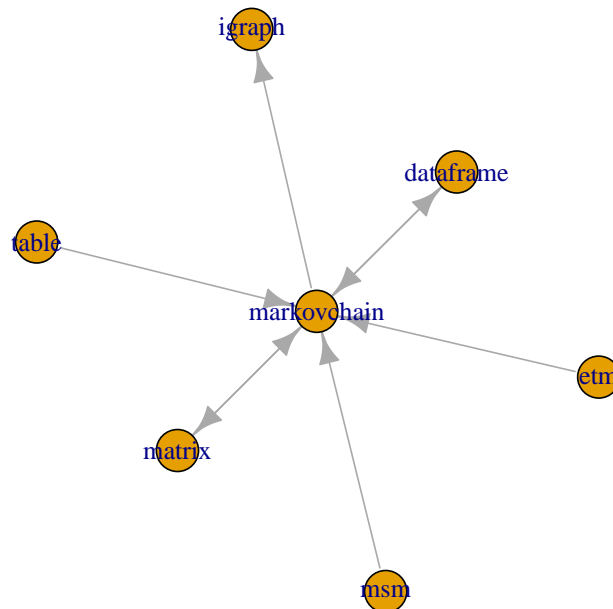


Figure 3: The **markovchain** methods for import and export.

```

0 0.0000000 0.5000000 0.5000000
1 0.5000000 0.0000000 0.5000000
2 0.3333333 0.3333333 0.3333333

```

Coerce from **matrix** method, as the code below shows, represents another approach to create a **markovchain** method starting from a given squared probability matrix.

```

R> myMatr<-matrix(c(.1,.8,.1,.2,.6,.2,.3,.4,.3), byrow=TRUE, ncol=3)
R> myMc<-as(myMatr, "markovchain")
R> myMc

```

Unnamed Markov chain

A 3 - dimensional discrete Markov Chain defined by the following states:

s1, s2, s3

The transition matrix (by rows) is defined as follows:

s1 s2 s3

```
s1 0.1 0.8 0.1
s2 0.2 0.6 0.2
s3 0.3 0.4 0.3
```

Non-homogeneous Markov chains can be created with the aid of `markovchainList` object. The example that follows arises from health insurance, where the costs associated to patients in a Continuous Care Health Community (CCHC) are modelled by a non-homogeneous Markov Chain, since the transition probabilities change by year. Methods explicitly written for `markovchainList` objects are: `print`, `show`, `dim` and `[-`.

```
R> stateNames = c("H", "I", "D")
R> Q0 <- new("markovchain", states = stateNames,
+           transitionMatrix = matrix(c(0.7, 0.2, 0.1, 0.1, 0.6, 0.3, 0, 0, 1),
+           byrow = TRUE, nrow = 3), name = "state t0")
R> Q1 <- new("markovchain", states = stateNames,
+           transitionMatrix = matrix(c(0.5, 0.3, 0.2, 0, 0.4, 0.6, 0, 0, 1),
+           byrow = TRUE, nrow = 3), name = "state t1")
R> Q2 <- new("markovchain", states = stateNames,
+           transitionMatrix = matrix(c(0.3, 0.2, 0.5, 0, 0.2, 0.8, 0, 0, 1),
+           byrow = TRUE, nrow = 3), name = "state t2")
R> Q3 <- new("markovchain", states = stateNames,
+           transitionMatrix = matrix(c(0, 0, 1, 0, 0, 1, 0, 0, 1),
+           byrow = TRUE, nrow = 3), name = "state t3")
R> mcCCRC <- new("markovchainList", markovchains = list(Q0, Q1, Q2, Q3),
+           name = "Continuous Care Health Community")
R> print(mcCCRC)
```

Continuous Care Health Community list of Markov chain(s)

Markovchain 1

state t0

A 3 - dimensional discrete Markov Chain defined by the following states:

H, I, D

The transition matrix (by rows) is defined as follows:

```
   H   I   D
H 0.7 0.2 0.1
I 0.1 0.6 0.3
D 0.0 0.0 1.0
```

Markovchain 2

state t1

A 3 - dimensional discrete Markov Chain defined by the following states:

H, I, D

The transition matrix (by rows) is defined as follows:

```
   H   I   D
H 0.5 0.3 0.2
I 0.0 0.4 0.6
D 0.0 0.0 1.0
```

```

Markovchain 3
state t2
  A 3 - dimensional discrete Markov Chain defined by the following states:
  H, I, D
  The transition matrix (by rows) is defined as follows:
      H   I   D
H 0.3 0.2 0.5
I 0.0 0.2 0.8
D 0.0 0.0 1.0

```

```

Markovchain 4
state t3
  A 3 - dimensional discrete Markov Chain defined by the following states:
  H, I, D
  The transition matrix (by rows) is defined as follows:
      H   I   D
H 0 0 1
I 0 0 1
D 0 0 1

```

It is possible to perform direct access to `markovchainList` elements, as well as to determine the number of `markovchain` objects by which a `markovchainList` object is composed.

```
R> mcCCRC[[1]]
```

```

state t0
  A 3 - dimensional discrete Markov Chain defined by the following states:
  H, I, D
  The transition matrix (by rows) is defined as follows:
      H   I   D
H 0.7 0.2 0.1
I 0.1 0.6 0.3
D 0.0 0.0 1.0

```

```
R> dim(mcCCRC)
```

```
[1] 4
```

The `markovchain` package contains some data found in the literature related to DTMC models (see Section 6). Table 2 lists datasets and tables included within the current release of the package.

Finally, Table 3 lists the demos included in the demo directory of the package.

Dataset	Description
<code>blanden</code>	Mobility across income quartiles, Jo Blanden and Machin (2005).
<code>craigsendi</code>	CD4 cells, B. A. Craig and A. A. Sendi (2002).
<code>kullback</code>	raw transition matrices for testing homogeneity, Kullback, Kupperman, and
<code>preproglucacon</code>	Preproglucacon DNA basis, P. J. Avery and D. A. Henderson (1999).
<code>rain</code>	Alofi Island rains, P. J. Avery and D. A. Henderson (1999).
<code>holson</code>	Individual states trajectiories.
<code>sales</code>	Sales of six beverages in Hong Kong.
Ching, Ng, and Fung (2008).	

Table 2: The `markovchain` `data.frame` and `table`.

R Code File	Description
<code>bard.R</code>	Structural analysis of Markov chains from Bard PPT.
<code>examples.R</code>	Notable Markov chains, e.g., The Gambler Ruin chain.
<code>quickStart.R</code>	Generic examples.
<code>extractMatrices.R</code>	Generic examples.

Table 3: The `markovchain` demos.

## 4. Probability with markovchain objects

The **markovchain** package contains functions to analyse DTMC from a probabilistic perspective. For example, the package provides methods to find stationary distributions and identifying absorbing and transient states. Many of these methods come from MATLAB listings that have been ported into R. For a full description of the underlying theory and algorithm the interested reader can overview the original MATLAB listings, [Feres \(2007\)](#) and [Montgomery \(2009\)](#).

Table 4 shows methods that can be applied on **markovchain** objects to perform probabilistic analysis.

Method	Returns
<b>absorbingStates</b>	the absorbing states of the transition matrix, if any.
<b>steadyStates</b>	the vector(s) of steady state(s) in matrix form.
<b>communicatingClasses</b>	list of communicating classes. $s_j$ , given actual state $s_i$ .
<b>canonicForm</b>	the transition matrix into canonic form.
<b>is.accessible</b>	verification if a state $j$ is reachable from state $i$ .
<b>is.irreducible</b>	verification whether a DTMC is irreducible.
<b>period</b>	the period of an irreducible DTMC.
<b>recurrentClasses</b>	list of recurrent classes.
<b>steadyStates</b>	the vector(s) of steady state(s) in matrix form.
<b>summary</b>	DTMC summary.
<b>transientStates</b>	the transient states of the transition matrix, if any.

Table 4: **markovchain** methods: statistical operations.

The conditional distribution of weather states, given that current day's weather is sunny, is given by following code.

```
R> conditionalDistribution(mcWeather, "sunny")
```

```
sunny cloudy rain
0.7    0.2    0.1
```

A stationary (steady state) vector is a probability vector such that Equation 11

$$\begin{aligned} 0 &\leq \pi_j \leq 1 \\ \sum_{j \in S} \pi_j &= 1 \\ \pi * P &= \pi \end{aligned} \tag{11}$$

Steady states are associated to  $P$  eigenvalues equal to one. Therefore the steady states vector can be identified by the following:

1. decompose the transition matrix in eigenvalues and eigenvectors;
2. consider only eigenvectors corresponding to eigenvalues equal to one;
3. normalize such eigenvalues so that the sum of their components is one.

Numeric issue (negative values) can arise when the Markov Chain contains more closed classes. If negative values are found in the initial solution, the above described algorithm is performed on the submatrix corresponding to recurrent P classes. Another vignette in the package focuses on this issue.

The result is returned in matrix form.

```
R> steadyStates(mcWeather)

      sunny    cloudy    rain
[1,] 0.4636364 0.3181818 0.2181818
```

It is possible for a Markov chain to have more than one stationary distribution, as the gambler ruin example shows.

```
R> gamblerRuinMarkovChain <- function(moneyMax, prob = 0.5) {
+   require(matlab)
+   matr <- zeros(moneyMax + 1)
+   states <- as.character(seq(from = 0, to = moneyMax, by = 1))
+   rownames(matr) = states; colnames(matr) = states
+   matr[1,1] = 1; matr[moneyMax + 1, moneyMax + 1] = 1
+   for(i in 2:moneyMax)
+   { matr[i,i-1] = 1 - prob; matr[i, i + 1] = prob }
+   out <- new("markovchain",
+             transitionMatrix = matr,
+             name = paste("Gambler ruin", moneyMax, "dim", sep = " ")
+           )
+   return(out)
+ }
R> mcGR4 <- gamblerRuinMarkovChain(moneyMax = 4, prob = 0.5)
R> steadyStates(mcGR4)
```

```
      0 1 2 3 4
[1,] 1 0 0 0 0
[2,] 0 0 0 0 1
```

Absorbing states are determined by means of `absorbingStates` method.

```
R> absorbingStates(mcGR4)

[1] "0" "4"

R> absorbingStates(mcWeather)

character(0)
```

The key function used within [Feres \(2007\)](#) (and `markovchain`'s derived functions) is `.commclassKernel`, that is called below.

```

R> .commclassesKernel <- function(P){
+   m <- ncol(P)
+   stateNames <- rownames(P)
+   T <- zeros(m)
+   i <- 1
+   while (i <= m) {
+     a <- i
+     b <- zeros(1,m)
+     b[1,i] <- 1
+     old <- 1
+     new <- 0
+     while (old != new) {
+       old <- sum(find(b > 0))
+       n <- size(a)[2]
+       matr <- matrix(as.numeric(P[a,]), ncol = m,
+         nrow = n)
+       c <- colSums(matr)
+       d <- find(c)
+       n <- size(d)[2]
+       b[1,d] <- ones(1,n)
+       new <- sum(find(b>0))
+       a <- d
+     }
+     T[i,] <- b
+     i <- i+1 }
+   F <- t(T)
+   C <- (T > 0)&(F > 0)
+   v <- (apply(t(C) == t(T), 2, sum) == m)
+   colnames(C) <- stateNames
+   rownames(C) <- stateNames
+   names(v) <- stateNames
+   out <- list(C = C, v = v)
+   return(out)
+ }

```

The `.commclassKernel` function gets a transition matrix of dimension  $n$  and return a list of two items:

1. **C**, an adjacency matrix showing for each state  $s_j$  (in the row) which states lie in the same communicating class of  $s_j$  (flagged with 1).
2. **v**, a binary vector indicating whether the state  $s_j$  is transient (0) or not (1).

These functions are used by two other internal functions on which the `summary` method for `markovchain` objects works.

The example matrix used in [Feres \(2007\)](#) well exemplifies the purpose of the function.

```

R> P <- matlab::zeros(10)
R> P[1, c(1, 3)] <- 1/2;
R> P[2, 2] <- 1/3; P[2,7] <- 2/3;
R> P[3, 1] <- 1;
R> P[4, 5] <- 1;
R> P[5, c(4, 5, 9)] <- 1/3;
R> P[6, 6] <- 1;
R> P[7, 7] <- 1/4; P[7,9] <- 3/4;
R> P[8, c(3, 4, 8, 10)] <- 1/4;
R> P[9, 2] <- 1;
R> P[10, c(2, 5, 10)] <- 1/3;
R> rownames(P) <- letters[1:10]
R> colnames(P) <- letters[1:10]
R> probMc <- new("markovchain", transitionMatrix = P,
+               name = "Probability MC")
R> .commclassesKernel(P)

```

\$C

	a	b	c	d	e	f	g	h	i	j
a	TRUE	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE
b	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	TRUE	FALSE
c	TRUE	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE
d	FALSE	FALSE	FALSE	TRUE	TRUE	FALSE	FALSE	FALSE	FALSE	FALSE
e	FALSE	FALSE	FALSE	TRUE	TRUE	FALSE	FALSE	FALSE	FALSE	FALSE
f	FALSE	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE
g	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	TRUE	FALSE
h	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	FALSE
i	FALSE	TRUE	FALSE	FALSE	FALSE	FALSE	TRUE	FALSE	TRUE	FALSE
j	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	FALSE	TRUE

\$v

	a	b	c	d	e	f	g	h	i	j
	TRUE	TRUE	TRUE	FALSE	FALSE	TRUE	TRUE	FALSE	TRUE	FALSE

```
R> summary(probMc)
```

Probability MC Markov chain that is composed by:

Closed classes:

a c

b g i

f

Recurrent classes:

{a,c},{b,g,i},{f}

Transient classes:

{d,e},{h},{j}

The Markov chain is not irreducible

The absorbing states are: f

All states that pertain to a transient class are named "transient" and a specific method has been written to elicit them.

```
R> transientStates(probMc)
```

```
[1] "d" "e" "h" "j"
```

Listings from [Feres \(2007\)](#) have been adapted into `canonicForm` method that turns a Markov chain into canonic form.

```
R> probMcCanonic <- canonicForm(probMc)
```

```
R> probMc
```

Probability MC

A 10 - dimensional discrete Markov Chain defined by the following states:

a, b, c, d, e, f, g, h, i, j

The transition matrix (by rows) is defined as follows:

	a	b	c	d	e	f	g	h	i
a	0.5	0.0000000	0.50	0.0000000	0.0000000	0	0.0000000	0.00	0.0000000
b	0.0	0.3333333	0.00	0.0000000	0.0000000	0	0.6666667	0.00	0.0000000
c	1.0	0.0000000	0.00	0.0000000	0.0000000	0	0.0000000	0.00	0.0000000
d	0.0	0.0000000	0.00	0.0000000	1.0000000	0	0.0000000	0.00	0.0000000
e	0.0	0.0000000	0.00	0.3333333	0.3333333	0	0.0000000	0.00	0.3333333
f	0.0	0.0000000	0.00	0.0000000	0.0000000	1	0.0000000	0.00	0.0000000
g	0.0	0.0000000	0.00	0.0000000	0.0000000	0	0.2500000	0.00	0.7500000
h	0.0	0.0000000	0.25	0.2500000	0.0000000	0	0.0000000	0.25	0.0000000
i	0.0	1.0000000	0.00	0.0000000	0.0000000	0	0.0000000	0.00	0.0000000
j	0.0	0.3333333	0.00	0.0000000	0.3333333	0	0.0000000	0.00	0.0000000

j

a	0.0000000
b	0.0000000
c	0.0000000
d	0.0000000
e	0.0000000
f	0.0000000
g	0.0000000
h	0.2500000
i	0.0000000
j	0.3333333

```
R> probMcCanonic
```

Probability MC

A 10 - dimensional discrete Markov Chain defined by the following states:

a, c, b, g, i, f, d, e, h, j

The transition matrix (by rows) is defined as follows:

```

      a      c      b      g      i f      d      e      h
a 0.5 0.50 0.0000000 0.0000000 0.0000000 0 0.0000000 0.0000000 0.00
c 1.0 0.00 0.0000000 0.0000000 0.0000000 0 0.0000000 0.0000000 0.00
b 0.0 0.00 0.3333333 0.6666667 0.0000000 0 0.0000000 0.0000000 0.00
g 0.0 0.00 0.0000000 0.2500000 0.7500000 0 0.0000000 0.0000000 0.00
i 0.0 0.00 1.0000000 0.0000000 0.0000000 0 0.0000000 0.0000000 0.00
f 0.0 0.00 0.0000000 0.0000000 0.0000000 1 0.0000000 0.0000000 0.00
d 0.0 0.00 0.0000000 0.0000000 0.0000000 0 0.0000000 1.0000000 0.00
e 0.0 0.00 0.0000000 0.0000000 0.3333333 0 0.3333333 0.3333333 0.00
h 0.0 0.25 0.0000000 0.0000000 0.0000000 0 0.2500000 0.0000000 0.25
j 0.0 0.00 0.3333333 0.0000000 0.0000000 0 0.0000000 0.3333333 0.00
      j
a 0.0000000
c 0.0000000
b 0.0000000
g 0.0000000
i 0.0000000
f 0.0000000
d 0.0000000
e 0.0000000
h 0.2500000
j 0.3333333

```

The function `is.accessible` permits to investigate whether a state  $s_j$  is accessible from state  $s_i$ , that is whether the probability to eventually reach  $s_j$  starting from  $s_i$  is greater than zero.

```
R> is.accessible(object = probMc, from = "a", to = "c")
```

```
[1] TRUE
```

```
R> is.accessible(object = probMc, from = "g", to = "c")
```

```
[1] FALSE
```

In Section 2.2 we observed that, if a DTMC is irreducible, all its states share the same periodicity. Then, the `period` function returns the periodicity of the DTMC, provided that it is irreducible. The example that follows shows how to find if a DTMC is reducible or irreducible by means of the function `is.irreducible` and, in the latter case, the method `period` is used to compute the periodicity of the chain.

```

R> E <- matrix(0, nrow = 4, ncol = 4)
R> E[1, 2] <- 1
R> E[2, 1] <- 1/3; E[2, 3] <- 2/3
R> E[3, 2] <- 1/4; E[3, 4] <- 3/4
R> E[4, 3] <- 1
R> mcE <- new("markovchain", states = c("a", "b", "c", "d"),

```

```
+           transitionMatrix = E,
+           name = "E")
R> is.irreducible(mcE)
```

```
[1] TRUE
```

```
R> period(mcE)
```

```
[1] 2
```

The example Markov chain found in Mathematica web site ([Wolfram Research 2013a](#)) has been used, and is plotted in Figure 4.

```
R> require(matlab)
R> mathematicaMatr <- zeros(5)
R> mathematicaMatr[1,] <- c(0, 1/3, 0, 2/3, 0)
R> mathematicaMatr[2,] <- c(1/2, 0, 0, 0, 1/2)
R> mathematicaMatr[3,] <- c(0, 0, 1/2, 1/2, 0)
R> mathematicaMatr[4,] <- c(0, 0, 1/2, 1/2, 0)
R> mathematicaMatr[5,] <- c(0, 0, 0, 0, 1)
R> statesNames <- letters[1:5]
R> mathematicaMc <- new("markovchain", transitionMatrix = mathematicaMatr,
+           name = "Mathematica MC", states = statesNames)
```

Mathematica MC Markov chain that is composed by:

Closed classes:

c d

e

Recurrent classes:

{c,d},{e}

Transient classes:

{a,b}

The Markov chain is not irreducible

The absorbing states are: e

[Feres \(2007\)](#) provides code to compute first passage time (within  $1, 2, \dots, n$  steps) given the initial state to be  $i$ . The MATLAB listings translated into R on which the `firstPassage` function is based are

```
R> .firstpassageKernel <- function(P, i, n){
+   G <- P
+   H <- P[i,]
+   E <- 1 - diag(size(P)[2])
+   for (m in 2:n) {
+     G <- P %*% (G * E)
```

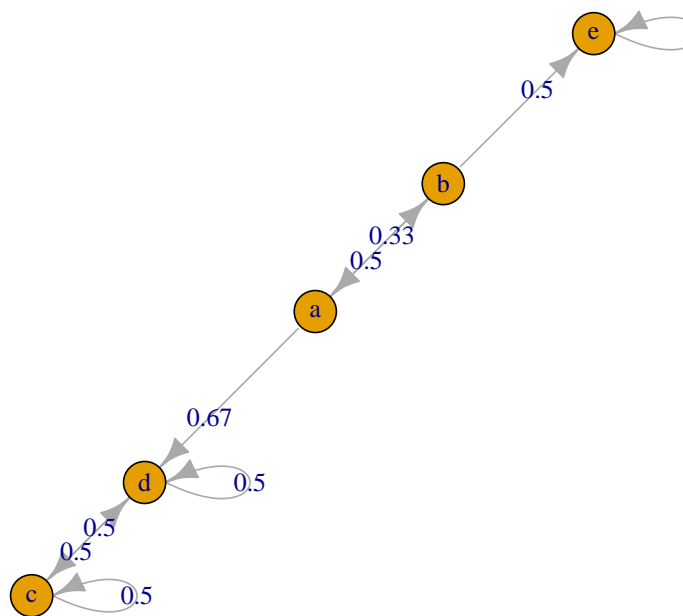


Figure 4: Mathematica 9 example. Markov chain plot.

```

+     H <- rbind(H, G[i,])
+   }
+   return(H)
+ }

```

We conclude that the probability for the first rainy day to be the third one, given that the current state is sunny, is given by

```

R> firstPassagePdF <- firstPassage(object = mcWeather, state = "sunny",
+                                   n = 10)
R> firstPassagePdF[3, 3]

[1] 0.121

```

## 5. Statistical analysis

Table 5 lists the functions and methods implemented within the package which help to fit, simulate and predict DTMC.

Function	Purpose
<code>markovchainFit</code>	Function to return fitted Markov chain for a given sequence.
<code>predict</code>	Method to calculate predictions from <code>markovchain</code> or <code>markovchainList</code> objects.
<code>rmarkovchain</code>	Function to sample from <code>markovchain</code> or <code>markovchainList</code> objects.

Table 5: The **markovchain** statistical functions.

### 5.1. Simulation

Simulating a random sequence from an underlying DTMC is quite easy thanks to the function `rmarkovchain`. The following code generates a year of weather states according to `mcWeather` underlying stochastic process.

```

R> weathersOfDays <- rmarkovchain(n = 365, object = mcWeather, t0 = "sunny")
R> weathersOfDays[1:30]

[1] "sunny" "sunny" "sunny" "sunny" "sunny" "sunny" "sunny"
[8] "sunny" "sunny" "sunny" "sunny" "sunny" "sunny" "cloudy"
[15] "sunny" "sunny" "cloudy" "rain" "cloudy" "sunny" "sunny"
[22] "cloudy" "sunny" "sunny" "sunny" "cloudy" "sunny" "cloudy"
[29] "rain" "sunny"

```

Similarly, it is possible to simulate one or more sequences from a non-homogeneous Markov chain, as the following code (applied on CCHC example) exemplifies.

```
R> patientStates <- rmarkovchain(n = 5, object = mcCCRC, t0 = "H",
+                               include.t0 = TRUE)
R> patientStates[1:10,]
```

	iteration	values
1	1	H
2	1	I
3	1	D
4	1	D
5	1	D
6	2	H
7	2	H
8	2	H
9	2	I
10	2	D

Two advance parameters are available to the `rmarkovchain` method which helps you decide which implementation to use. There are four options available : R, R in parallel, C++ and C++ in parallel. Two boolean parameters `useRcpp` and `parallel` will decide which implementation will be used. Default is `useRcpp = TRUE` and `parallel = FALSE` i.e. C++ implementation. The C++ implementation is generally faster than the R implementation. If you have multicore processors then you can take advantage of `parallel` parameter by setting it to `TRUE`. When both `Rcpp=TRUE` and `parallel=TRUE` the parallelization has been carried out using **RcppParallel** package ([Allaire, Francois, Ushey, Vandenbrouck, Geelhard, and Intel 2016](#)).

## 5.2. Estimation

A time homogeneous Markov chain can be fit from given data. Four methods have been implemented within current version of **markovchain** package: maximum likelihood, maximum likelihood with Laplace smoothing, Bootstrap approach, maximum a posteriori.

Equation 12 shows the maximum likelihood estimator (MLE) of the  $p_{ij}$  entry, where the  $n_{ij}$  element consists in the number sequences  $(X_t = s_i, X_{t+1} = s_j)$  found in the sample, that is

$$\hat{p}_{ij}^{MLE} = \frac{n_{ij}}{\sum_{u=1}^k n_{iu}}. \quad (12)$$

Equation 13 shows the `standardError` of the MLE ([Skuriat-Olechnowska 2005](#)).

$$SE_{ij} = \frac{\hat{p}_{ij}^{MLE}}{\sqrt{n_{ij}}} \quad (13)$$

```
R> weatherFittedMLE <- markovchainFit(data = weathersOfDays, method = "mle", name = "Weather")
R> weatherFittedMLE$estimate
```

Weather MLE

A 3 - dimensional discrete Markov Chain defined by the following states:

```
cloudy, rain, sunny
The transition matrix (by rows) is defined as follows:
      cloudy      rain      sunny
cloudy 0.3790323 0.29838710 0.3225806
rain   0.4871795 0.34615385 0.1666667
sunny  0.2407407 0.08641975 0.6728395
```

```
R> weatherFittedMLE$standardError
```

```
      cloudy      rain      sunny
cloudy 0.05528754 0.04905454 0.05100448
rain   0.07903095 0.06661734 0.04622502
sunny  0.03854937 0.02309665 0.06444634
```

The Laplace smoothing approach is a variation of the MLE, where the  $n_{ij}$  is substituted by  $n_{ij} + \alpha$  (see Equation 14), being  $\alpha$  an arbitrary positive stabilizing parameter.

$$\hat{p}_{ij}^{LS} = \frac{n_{ij} + \alpha}{\sum_{u=1}^k (n_{iu} + \alpha)} \quad (14)$$

```
R> weatherFittedLAPLACE <- markovchainFit(data = weathersOfDays,
+                                          method = "laplace", laplacian = 0.01,
+                                          name = "Weather LAPLACE")
R> weatherFittedLAPLACE$estimate
```

```
Weather LAPLACE
```

```
A 3 - dimensional discrete Markov Chain defined by the following states:
```

```
cloudy, rain, sunny
The transition matrix (by rows) is defined as follows:
      cloudy      rain      sunny
cloudy 0.3790212 0.29839555 0.3225832
rain   0.4871203 0.34614892 0.1667307
sunny  0.2407579 0.08646547 0.6727766
```

(NOTE: The Confidence Interval option is enabled by default. Remove this option to fasten computations.) Both MLE and Laplace approach are based on the `createSequenceMatrix` functions that converts a data (character) sequence into a contingency table, showing the  $(X_t = i, X_{t+1} = j)$  distribution within the sample, as code below shows.

```
R> createSequenceMatrix(stringchar = weathersOfDays)
```

```
      cloudy rain sunny
cloudy   47   37   40
rain     38   27   13
sunny    39   14  109
```

`stringchar` could contain NA values, and the transitions containing NA would be ignored.

An issue occurs when the sample contains only one realization of a state (say  $X_\beta$ ) which is located at the end of the data sequence, since it yields to a row of zero (no sample to estimate the conditional distribution of the transition). In this case the estimated transition matrix is corrected assuming  $p_{\beta,j} = 1/k$ , being  $k$  the possible states.

Create sequence matrix can also be used to obtain raw count transition matrices from a given  $n * 2$  matrix as the following example shows:

```
R> myMatr<-matrix(c("a","b","b","a","a","b","b","b","b","a","a","a","b","a"),ncol=2)
R> createSequenceMatrix(stringchar = myMatr,toRowProbs = TRUE)
```

```
      a      b
a 0.6666667 0.3333333
b 0.5000000 0.5000000
```

A bootstrap estimation approach has been developed within the package in order to provide an indication of the variability of  $\hat{p}_{ij}$  estimates. The bootstrap approach implemented within the **markovchain** package follows these steps:

1. bootstrap the data sequences following the conditional distributions of states estimated from the original one. The default bootstrap samples is 10, as specified in `nboot` parameter of `markovchainFit` function.
2. apply MLE estimation on bootstrapped data sequences that are saved in `bootStrapSamples` slot of the returned list.
3. the  $p^{BOOTSTRAP}_{ij}$  is the average of all  $p^{MLE}_{ij}$  across the `bootStrapSamples` list, normalized by row. A `standardError` of  $p^{\hat{MLE}}_{ij}$  estimate is provided as well.

```
R> weatherFittedBOOT <- markovchainFit(data = weathersOfDays,
+                                     method = "bootstrap", nboot = 20)
R> weatherFittedBOOT$estimate
```

BootStrap Estimate

A 3 - dimensional discrete Markov Chain defined by the following states:  
cloudy, rain, sunny

The transition matrix (by rows) is defined as follows:

```
      cloudy      rain      sunny
cloudy 0.3884175 0.29402251 0.3175600
rain   0.4723063 0.35580253 0.1718912
sunny  0.2555405 0.07612772 0.6683318
```

```
R> weatherFittedBOOT$standardError
```

```
      cloudy      rain      sunny
cloudy 0.007832050 0.012821710 0.011835006
rain   0.010778315 0.009417920 0.009383170
sunny  0.008420141 0.005095549 0.008787744
```

The bootstrapping process can be done in parallel thanks to **RcppParallel** package ([Allaire et al. 2016](#)). Parallelized implementation is definitively suggested when the data sample size or the required number of bootstrap runs is high.

```
R> weatherFittedBOOTParallel <- markovchainFit(data = weathersOfDays,
+                                              method = "bootstrap", nboot = 20,
+                                              parallel = TRUE)
R> weatherFittedBOOTParallel$estimate
R> weatherFittedBOOTParallel$standardError
```

The parallel bootstrapping uses all the available cores on a machine by default. However, it is also possible to tune the number of threads used. Note that this should be done in R before calling the `markovchainFit` function. For example, the following code will set the number of threads to 4.

```
R> RcppParallel::setNumThreads(2)
```

For more details, please refer to **RcppParallel** web site.

For all the fitting methods, the `logLikelihood` ([Skuriat-Olechnowska 2005](#)) denoted in Equation 15 is provided.

$$LLH = \sum_{i,j} n_{ij} * \log(p_{ij}) \quad (15)$$

where  $n_{ij}$  is the entry of the frequency matrix and  $p_{ij}$  is the entry of the transition probability matrix.

```
R> weatherFittedMLE$logLikelihood
```

```
[1] -347.8699
```

```
R> weatherFittedBOOT$logLikelihood
```

```
[1] -348.1088
```

Confidence matrices of estimated parameters (parametric for MLE, non - parametric for BootStrap) are available as well. The `confidenceInterval` is provided with the two matrices: `lowerEndpointMatrix` and `upperEndpointMatrix`. The confidence level (CL) is 0.95 by default and can be given as an argument of the function `markovchainFit`. This is used to obtain the standard score (z-score). Equations 16 and 17 ([Skuriat-Olechnowska 2005](#)) show the `confidenceInterval` of a fitting. Note that each entry of the matrices is bounded between 0 and 1.

$$LowerEndpoint_{ij} = p_{ij} - zscore(CL) * SE_{ij} \quad (16)$$

$$UpperEndpoint_{ij} = p_{ij} + zscore(CL) * SE_{ij} \quad (17)$$

```
R> weatherFittedMLE$confidenceInterval

NULL

R> weatherFittedBOOT$confidenceInterval
```

```
$confidenceLevel
[1] 0.95
```

```
$lowerEndpointMatrix
      cloudy      rain      sunny
cloudy 0.3755349 0.27293267 0.2980931
rain   0.4545775 0.34031143 0.1564572
sunny  0.2416906 0.06774629 0.6538772
```

```
$upperEndpointMatrix
      cloudy      rain      sunny
cloudy 0.4013001 0.31511234 0.3370269
rain   0.4900350 0.37129363 0.1873251
sunny  0.2693904 0.08450916 0.6827863
```

A special function, `multinomialConfidenceIntervals`, has been written in order to obtain multinomial wise confidence intervals. The code has been based on and Rcpp translation of package's **MultinomialCI** functions Villacorta (2012) that were themselves based on the Sison and Glaz (1995) paper.

```
R> multinomialConfidenceIntervals(transitionMatrix =
+   weatherFittedMLE$estimate@transitionMatrix,
+   countsTransitionMatrix = createSequenceMatrix(weathersOfDays))
```

```
$confidenceLevel
[1] 0.95
```

```
$lowerEndpointMatrix
      cloudy      rain      sunny
cloudy 0.2903226 0.20967742 0.23387097
rain   0.3846154 0.24358974 0.06410256
sunny  0.1728395 0.01851852 0.60493827
```

```
$upperEndpointMatrix
      cloudy      rain      sunny
cloudy 0.4798274 0.3991822 0.4233758
rain   0.6130492 0.4720236 0.2925364
sunny  0.3155597 0.1612387 0.7476585
```

The functions for fitting DTMC have mostly been rewritten in C++ using Rcpp Eddelbuettel (2013) since version 0.2.

It is also possible to fit a DTMC object from `matrix` or `data.frame` objects as shown in following code.

```
R> data(holson)
R> singleMc<-markovchainFit(data=holson[,2:12],name="holson")
```

The same applies for `markovchainList`.

```
R> mcListFit<-markovchainListFit(data=holson[,2:6],name="holson")
R> mcListFit$estimate
```

```
holson  list of Markov chain(s)
Markovchain  1
Unnamed Markov chain
A 3 - dimensional discrete Markov Chain defined by the following states:
1, 2, 3
The transition matrix (by rows) is defined as follows:
      1      2      3
1 0.94609164 0.05390836 0.00000000
2 0.26356589 0.62790698 0.1085271
3 0.02325581 0.18604651 0.7906977
```

```
Markovchain  2
Unnamed Markov chain
A 3 - dimensional discrete Markov Chain defined by the following states:
1, 2, 3
The transition matrix (by rows) is defined as follows:
      1      2      3
1 0.9323410 0.0676590 0.00000000
2 0.2551724 0.5103448 0.2344828
3 0.0000000 0.0862069 0.9137931
```

```
Markovchain  3
Unnamed Markov chain
A 3 - dimensional discrete Markov Chain defined by the following states:
1, 2, 3
The transition matrix (by rows) is defined as follows:
      1      2      3
1 0.94765840 0.04820937 0.004132231
2 0.26119403 0.66417910 0.074626866
3 0.01428571 0.13571429 0.850000000
```

```
Markovchain  4
Unnamed Markov chain
A 3 - dimensional discrete Markov Chain defined by the following states:
1, 2, 3
The transition matrix (by rows) is defined as follows:
```

	1	2	3
1	0.9172414	0.07724138	0.005517241
2	0.1678322	0.60839161	0.223776224
3	0.0000000	0.03030303	0.969696970

Finally, given a `list` object, it is possible to fit a `markovchain` object or to obtain the raw transition matrix.

```
R> c1<-c("a","b","a","a","c","c","a")
R> c2<-c("b")
R> c3<-c("c","a","a","c")
R> c4<-c("b","a","b","a","a","c","b")
R> c5<-c("a","a","c","b")
R> c6<-c("b","c","b","c","a")
R> mylist<-list(c1,c2,c3,c4,c5,c6)
R> mylistMc<-markovchainFit(data=mylist)
R> mylistMc
```

`$estimate`

MLE Fit

A 3 - dimensional discrete Markov Chain defined by the following states:

a, b, c

The transition matrix (by rows) is defined as follows:

	a	b	c
a	0.4000000	0.2000000	0.4000000
b	0.6000000	0.0000000	0.4000000
c	0.4285714	0.4285714	0.1428571

`$standardError`

	a	b	c
a	0.2000000	0.1414214	0.2000000
b	0.3464102	0.0000000	0.2828427
c	0.2474358	0.2474358	0.1428571

`$confidenceLevel`

[1] 0.95

`$lowerEndpointMatrix`

	a	b	c
a	0.07102927	0.00000000	0.07102927
b	0.03020599	0.00000000	0.00000000
c	0.02157571	0.02157571	0.00000000

`$upperEndpointMatrix`

	a	b	c
a	0.7289707	0.4326174	0.7289707

```
b 1.0000000 0.0000000 0.8652349
c 0.8355672 0.8355672 0.3778362
```

The same works for `markovchainFitList`.

```
R> markovchainListFit(data=mylist)
```

```
$estimate
```

```
list of Markov chain(s)
```

```
Markovchain 1
```

```
Unnamed Markov chain
```

```
A 3 - dimensional discrete Markov Chain defined by the following states:
```

```
a, b, c
```

```
The transition matrix (by rows) is defined as follows:
```

```
  a    b    c
```

```
a 0.5 0.5 0.0
```

```
b 0.5 0.0 0.5
```

```
c 1.0 0.0 0.0
```

```
Markovchain 2
```

```
Unnamed Markov chain
```

```
A 3 - dimensional discrete Markov Chain defined by the following states:
```

```
a, b, c
```

```
The transition matrix (by rows) is defined as follows:
```

```
  a      b      c
```

```
a 0.3333333 0.3333333 0.3333333
```

```
b 1.0000000 0.0000000 0.0000000
```

```
c 0.0000000 1.0000000 0.0000000
```

```
Markovchain 3
```

```
Unnamed Markov chain
```

```
A 3 - dimensional discrete Markov Chain defined by the following states:
```

```
a, b, c
```

```
The transition matrix (by rows) is defined as follows:
```

```
  a b    c
```

```
a 0.5 0 0.5
```

```
b 0.5 0 0.5
```

```
c 0.0 1 0.0
```

```
Markovchain 4
```

```
Unnamed Markov chain
```

```
A 2 - dimensional discrete Markov Chain defined by the following states:
```

```
a, c
```

```
The transition matrix (by rows) is defined as follows:
```

```
  a    c
```

```
a 0.5 0.5
```

```
c 1.0 0.0
```

```

Markovchain 5
Unnamed Markov chain
A 2 - dimensional discrete Markov Chain defined by the following states:
a, c
The transition matrix (by rows) is defined as follows:
  a c
a 0 1
c 0 1

```

```

Markovchain 6
Unnamed Markov chain
A 3 - dimensional discrete Markov Chain defined by the following states:
a, b, c
The transition matrix (by rows) is defined as follows:
      a      b      c
a 0.3333333 0.3333333 0.3333333
b 0.3333333 0.3333333 0.3333333
c 0.5000000 0.5000000 0.0000000

```

If any transition contains NA, it will be ignored in the results.

### 5.3. Prediction

The  $n$ -step forward predictions can be obtained using the `predict` methods explicitly written for `markovchain` and `markovchainList` objects. The prediction is the mode of the conditional distribution of  $X_{t+1}$  given  $X_t = s_j$ , being  $s_j$  the last realization of the DTMC (homogeneous or non-homogeneous).

#### *Predicting from a markovchain object*

The 3-days forward predictions from `markovchain` object can be generated as follows, assuming that the last two days were respectively "cloudy" and "sunny".

```

R> predict(object = weatherFittedMLE$estimate, newdata = c("cloudy", "sunny"),
+          n.ahead = 3)

```

```

[1] "sunny" "sunny" "sunny"

```

#### *Predicting from a markovchainList object*

Given an initial two year Healty status, the 5-year ahead prediction of any CCRC guest is

```

R> predict(mcCCRC, newdata = c("H", "H"), n.ahead = 5)

```

```

[1] "H" "D" "D"

```

The prediction has stopped at time sequence since the underlying non-homogeneous Markov chain has a length of four. In order to continue five years ahead, the `continue=TRUE` parameter setting makes the `predict` method keeping to use the last `markovchain` in the sequence list.

```
R> predict(mcCCRC, newdata = c("H", "H"), n.ahead = 5, continue = TRUE)
```

```
[1] "H" "D" "D" "D" "D"
```

## 5.4. Statistical Tests

In this section, we describe the statistical tests: assessing the Markov property (`verifyMarkovProperty`), the order (`assessOrder`), the stationarity (`assessStationarity`) of a Markov chain sequence, and the divergence test for empirically estimated transition matrices (`divergenceTest`). Most of such tests are based on the  $\chi^2$  statistics. Relevant references are [Kullback \*et al.\* \(1962\)](#) and [Anderson and Goodman \(1957\)](#).

### *Assessing the Markov property of a Markov chain sequence*

The `verifyMarkovProperty` function verifies whether the Markov property holds for the given chain. The test implemented in the package looks at triplets of successive observations. If  $x_1, x_2, \dots, x_N$  is a set of observations and  $n_{ijk}$  is the number of times  $t$  ( $1 \leq t \leq N - 2$ ) such that  $x_t = i, x_{t+1} = j, x_{t+2} = k$ , then if the Markov property holds  $n_{ijk}$  follows a Binomial distribution with parameters  $n_{ij}$  and  $p_{jk}$ . A classical  $\chi^2$  test can check this distributional assumption, since  $\sum_i \sum_j \sum_k \frac{n_{ijk} - n_{ij}p_{jk}}{n_{ij}p_{jk}} \sim \chi^2(|S|^3)$  where  $|S|$  is the cardinality of the state space.

```
R> sample_sequence<-c("a", "b", "a", "a", "a", "a", "b", "a", "b", "a",  
+ "b", "a", "a", "b", "b", "b", "a")  
R> verifyMarkovProperty(sample_sequence)
```

Testing markovianity property on given data sequence

ChiSq statistic is: 0.28 degrees of freedom are: 8 and corresponding p-value is: 0.99998

### *Assessing the order of a Markov chain sequence*

The `assessOrder` function checks whether the given chain is of first order or of second order. For each possible present state, we construct a contingency table of the frequency of the future state for each past to present state transition as shown in Table 6.

past	present	future a	future b
a	a	2	2
b	a	2	2

Table 6: Contingency table to assess the order for the present state a.

Using the table, the function performs the  $\chi^2$  test by calling the `chisq.test` function. This test returns a list of the chi-squared value and the p-value. If the p-value is greater than the given significance level, we cannot reject the hypothesis that the sequence is of first order.

```
R> data(rain)
R> assessOrder(rain$rain)
```

The `assessOrder` test statistic is: 26.09575 the Chi-Square d.f. are: 12 the p-value is

### *Assessing the stationarity of a Markov chain sequence*

The `assessStationarity` function assesses if the transition probabilities of the given chain change over time. To be more specific, the chain is stationary if the following condition meets.

$$p_{ij}(t) = p_{ij} \text{ for all } t \quad (18)$$

For each possible state, we construct a contingency table of the estimated transition probabilities over time as shown in Table 7.

time (t)	probability of transition to a	probability of transition to b
1	0	1
2	0	1
.	.	.
.	.	.
.	.	.
16	0.44	0.56

Table 7: Contingency table to assess the stationarity of the state a.

Using the table, the function performs the  $\chi^2$  test by calling the `chisq.test` function. This test returns a list of the chi-squared value and the p-value. If the p-value is greater than the given significance level, we cannot reject the hypothesis that the sequence is stationary.

```
R> assessStationarity(rain$rain, 10)
```

The `assessStationarity` test statistic is: 4.181815 the Chi-Square d.f. are: 54 the p-v

### *Divergence tests for empirically estimated transition matrices*

This section discusses tests developed to verify whether:

1. An empirical transition matrix is consistent with a theoretical one.
2. Two or more empirical transition matrices belongs to the same DTMC.

The first test is implemented by the `verifyEmpiricalToTheoretical` function. Bein  $f_{ij}$  the raw transition count, Kullback *et al.* (1962) shows that  $2 * \sum_{i=1}^r \sum_{j=1}^r f_{ij} \ln \frac{f_{ij}}{f_{i.} P(E_j|E_i)} \sim \chi^2(r * (r - 1))$ . The following example is taken from Kullback *et al.* (1962):

```
R> sequence<-c(0,1,2,2,1,0,0,0,0,0,0,1,2,2,2,1,0,0,1,0,0,0,0,0,1,1,
+ 2,0,0,2,1,1,0,0,0,0,0,0,0,0,0,0,0,0,1,1,1,1,0,0,0,0,2,1,0,
+ 0,2,1,0,0,0,0,0,0,1,1,1,2,2,0,0,2,1,1,1,1,2,1,1,1,1,1,1,1,1,0,2,
+ 0,1,1,0,0,0,1,2,2,0,0,0,0,0,0,2,2,2,1,1,1,1,0,1,1,1,1,0,0,2,1,1,
+ 0,0,0,0,0,2,2,1,1,1,1,1,2,1,2,0,0,0,1,2,2,2,0,0,0,1,1)
R> mc=matrix(c(5/8,1/4,1/8,1/4,1/2,1/4,1/4,3/8,3/8),byrow=TRUE, nrow=3)
R> rownames(mc)<-colnames(mc)<-0:2; theoreticalMc<-as(mc, "markovchain")
R> verifyEmpiricalToTheoretical(data=sequence,object=theoreticalMc)
```

Testing whether the

```
  0  1  2
0 51 11  8
1 12 31  9
2  6 11 10
```

transition matrix is compatible with

```
  0      1      2
0 0.625 0.250 0.125
1 0.250 0.500 0.250
2 0.250 0.375 0.375
```

```
[1] "theoretical transition matrix"
```

```
ChiSq statistic is 6.551795 d.o.f are 6 corresponding p-value is 0.3642899
$statistic
```

```
  0
6.551795
```

```
$dof
```

```
[1] 6
```

```
$pvalue
```

```
  0
0.3642899
```

The second one is implemented by the `verifyHomogeneity` function. Assuming that  $i = 1, 2, \dots, s$  DTMC samples are available and that the cardinality of the state space is  $r$  it verifies whether the  $s$  chains belongs to the same unknown one. [Kullback \*et al.\* \(1962\)](#) shows that its test statistics follows a chi-square law,  $2 * \sum_{i=1}^s \sum_{j=1}^r \sum_{k=1}^r f_{ijk} \ln \frac{n * f_{ijk}}{f_{i..} f_{.jk}} \sim \chi^2(r * (r - 1))$ . Also the following example is taken from [Kullback \*et al.\* \(1962\)](#):

```
R> data(kullback)
R> verifyHomogeneity(inputList=kullback,verbose=TRUE)
```

Testing homogeneity of DTMC underlying input list

```
ChiSq statistic is 275.9963 d.o.f are 35 corresponding p-value is 0
```

```
$statistic
```

```
[1] 275.9963
```

\$dof

[1] 35

\$pvalue

[1] 0

## 5.5. Continuous Times Markov Chains

### Intro

The **markovchain** package provides functionality for continuous time Markov chains (CTMCs). CTMCs are a generalisation of discrete time Markov chains (DTMCs) in that we allow time to be continuous. We assume a finite state space  $S$  (for an infinite state space wouldn't fit in memory). We can think of CTMCs as Markov chains in which state transitions can happen at any time.

More formally, we would like our CTMCs to satisfy the following two properties:

- The Markov property - let  $F_{X(s)}$  denote the information about  $X$  upto time  $s$ . Let  $j \in S$  and  $s \leq t$ . Then,  $P(X(t) = j | F_{X(s)}) = P(X(t) = j | X(s))$ .
- Time homogeneity -  $P(X(t) = j | X(s) = k) = P(X(t - s) = j | X(0) = k)$ .

If both the above properties are satisfied, it is referred to as a time-homogeneous CTMC. If a transition occurs at time  $t$ , then  $X(t)$  denotes the new state and  $X(t) \neq X(t-)$ .

Now, let  $X(0) = x$  and let  $T_x$  be the time a transition occurs from this state. We are interested in the distribution of  $T_x$ . For  $s, t \geq 0$ , it can be shown that  $P(T_x > s + t | T_x > s) = P(T_x > t)$ .

This is the memory less property that only the exponential random variable exhibits. Therefore, this is the sought distribution, and each state  $s \in S$  has an exponential holding parameter  $\lambda(s)$ . Since  $ET_x = \frac{1}{\lambda(x)}$ , higher the rate  $\lambda(x)$ , smaller the expected time of transitioning out of the state  $x$ .

However, specifying this parameter alone for each state would only paint an incomplete picture of our CTMC. To see why, consider a state  $x$  that may transition to either state  $y$  or  $z$ . The holding parameter enables us to predict when a transition may occur if we start off in state  $x$ , but tells us nothing about which state will be next.

To this end, we also need transition probabilities associated with the process, defined as follows (for  $y \neq x$ ) -  $p_{xy} = P(X(T_x) = y | X(0) = x)$ . Note that  $\sum_{y \neq x} p_{xy} = 1$ . Let  $Q$  denote this transition matrix ( $Q_{ij} = p_{ij}$ ). What is key here is that  $T_x$  and the state  $y$  are independent random variables. Let's define  $\lambda(x, y) = \lambda(x)p_{xy}$ .

We now look at Kolmogorov's backward equation. Let's define  $P_{ij}(t) = P(X(t) = j | X(0) = i)$  for  $i, j \in S$ . The backward equation is given by (it can be proved)  $P_{ij}(t) = \delta_{ij}e^{-\lambda(i)t} + \int_0^t \lambda(i)e^{-\lambda(i)s} \sum_{k \neq i} Q_{ik}P_{kj}(t-s)ds$ . Basically, the first term is non-zero if and only if  $i = j$  and represents the probability that the first transition from state  $i$  occurs after time  $t$ . This would mean that at  $t$ , the state is still  $i$ . The second term accounts for any transitions that may occur before time  $t$  and denotes the probability that at time  $t$ , when the smoke clears, we are in state  $j$ .



To generate random CTMC transitions, we provide an initial distribution of the states. This must be in the same order as the dimnames of the generator. The output can be returned either as a list or a data frame.

```
R> statesDist <- c(0.8, 0.2)
R> rctmc(n = 3, ctmc = molecularCTMC, initDist = statesDist, out.type = "df", include.TO = FALSE)

      states      time
1      sigma 0.839708235072804
2 sigma_star 0.932185871656202
3      sigma 2.45310400803475
```

$n$  represents the number of samples to generate. There is an optional argument  $T$  for `rctmc`. It represents the time of termination of the simulation. To use this feature, set  $n$  to a very high value, say `Inf` (since we do not know the number of transitions before hand) and set  $T$  accordingly.

```
R> statesDist <- c(0.8, 0.2)
R> rctmc(n = Inf, ctmc = molecularCTMC, initDist = statesDist, T = 2)

[[1]]
[1] "sigma"      "sigma_star" "sigma"      "sigma_star" "sigma"
[6] "sigma_star"

[[2]]
[1] 0.0000000 0.1439937 0.3352246 1.2313218 1.2889825 1.4448601
```

To obtain the stationary distribution simply invoke the `steadyStates` function

```
R> steadyStates(molecularCTMC)

      sigma sigma_star
[1,] 0.25      0.75
```

For fitting, use the `ctmcFit` function. It returns the MLE values for the parameters along with the confidence intervals.

```
R> data <- list(c("a", "b", "c", "a", "b", "a", "c", "b", "c"),
+             c(0, 0.8, 2.1, 2.4, 4, 5, 5.9, 8.2, 9))
R> ctmcFit(data)

$estimate
An object of class "ctmc"
Slot "states":
[1] "a" "b" "c"
```

```

Slot "byrow":
[1] TRUE

Slot "generator":
      a      b      c
a -0.9090909  0.6060606  0.3030303
b  0.3225806 -0.9677419  0.6451613
c  0.3846154  0.3846154 -0.7692308

Slot "name":
[1] ""

$errors
$errors$dtmcConfidenceInterval
$errors$dtmcConfidenceInterval$confidenceLevel
[1] 0.95

$errors$dtmcConfidenceInterval$lowerEndpointMatrix
  a b c
a 0 0 0
b 0 0 0
c 0 0 0

$errors$dtmcConfidenceInterval$upperEndpointMatrix
      a b      c
a 0.0000000 1 0.8816179
b 0.8816179 0 1.0000000
c 1.0000000 1 0.0000000

$errors$lambdaConfidenceInterval
$errors$lambdaConfidenceInterval$lowerEndpointVector
[1] 0.04576665 0.04871934 0.00000000

$errors$lambdaConfidenceInterval$upperEndpointVector
[1] 1 1 1

```

One approach to obtain the generator matrix is to apply the `logm` function from the **expm** package on a transition matrix. Numeric issues arise, see [Israel, Rosenthal, and Wei \(2001\)](#). For example, applying the standard `method` ('Higham08') on `mcWeather` raises an error, whilst the alternative method (eigenvalue decomposition) is ok. The following code estimates the generator matrix of the `mcWeather` transition matrix.

```

R> mcWeatherQ <- expm::logm(mcWeather@transitionMatrix,method='Eigen')
R> mcWeatherQ

```

	sunny	cloudy	rain
sunny	-0.863221	2.428723	-1.565502
cloudy	4.284592	-20.116312	15.831720
rain	-4.414019	24.175251	-19.761232

Therefore, the "half - day" transition probability for mcWeather DTMC is

```
R> mcWeatherHalfDayTM <- expm::expm(mcWeatherQ*.5)
R> mcWeatherHalfDay <- new("markovchain",transitionMatrix=mcWeatherHalfDayTM,name="Half Day")
R> mcWeatherHalfDay
```

Half Day Weather Transition Matrix

A 3 - dimensional discrete Markov Chain defined by the following states:

sunny, cloudy, rain

The transition matrix (by rows) is defined as follows:

	sunny	cloudy	rain
sunny	0.81598647	0.1420068	0.04200677
cloudy	0.21970167	0.4401492	0.34014916
rain	0.07063048	0.5146848	0.41468476

## 5.6. Bayesian Estimation

The **markovchain** package provides functionality for maximum a posteriori (MAP) estimation of the chain parameters (at the time of writing this document, only first order models are supported) by Bayesian inference. It also computes the probability of observing a new data set, given a (different) data set. This vignette provides the mathematical description for the methods employed by the package.

### *Notation and set-up*

The data is denoted by  $D$ , the model parameters (transition matrix) by  $\theta$ . The object of interest is  $P(\theta|D)$  (posterior density).  $\mathcal{A}$  represents an alphabet class, each of whose members represent a state of the chain. Therefore

$$D = s_0 s_1 \dots s_{N-1}, s_t \in \mathcal{A}$$

where  $N$  is the length of the data set. Also,

$$\theta = \{p(s|u), s \in \mathcal{A}, u \in \mathcal{A}\}$$

where  $\sum_{s \in \mathcal{A}} p(s|u) = 1$  for each  $u \in \mathcal{A}$ .

Our objective is to find  $\theta$  which maximises the posterior. That is, if our solution is denoted by  $\hat{\theta}$ , then

$$\hat{\theta} = \underset{\theta}{\operatorname{argmax}} P(\theta|D)$$

where the search space is the set of right stochastic matrices of dimension  $|\mathcal{A}| \times |\mathcal{A}|$ .  $n(u, s)$  denotes the number of times the word  $us$  occurs in  $D$  and  $n(u) = \sum_{s \in \mathcal{A}} n(u, s)$ . The hyperparameters are similarly denoted by  $\alpha(u, s)$  and  $\alpha(u)$  respectively.

### Methods

Given  $D$ , its likelihood conditioned on the observed initial state in  $D$  is given by

$$P(D|\theta) = \prod_{s \in \mathcal{A}} \prod_{u \in \mathcal{A}} p(s|u)^{n(u,s)}$$

Conjugate priors are used to model the prior  $P(\theta)$ . The reasons are two fold:

1. Exact expressions can be derived for the MAP estimates, expectations and even variances
2. Model order selection/comparison can be implemented easily (available in a future release of the package)

The hyperparameters determine the form of the prior distribution, which is a product of Dirichlet distributions

$$P(\theta) = \prod_{u \in \mathcal{A}} \left\{ \frac{\Gamma(\alpha(u))}{\prod_{s \in \mathcal{A}} \Gamma(\alpha(u, s))} \prod_{s \in \mathcal{A}} p(s|u)^{\alpha(u,s)-1} \right\}$$

where  $\Gamma(\cdot)$  is the Gamma function. The hyperparameters are specified using the `hyperparam` argument in the `markovchainFit` function. If this argument is not specified, then a default value of 1 is assigned to each hyperparameter resulting in the prior distribution of each chain parameter to be uniform over  $[0, 1]$ .

Given the likelihood and the prior as described above, the evidence  $P(D)$  is simply given by

$$P(D) = \int P(D|\theta)P(\theta)d\theta$$

which simplifies to

$$P(D) = \prod_{u \in \mathcal{A}} \left\{ \frac{\Gamma(\alpha(u))}{\prod_{s \in \mathcal{A}} \Gamma(\alpha(u, s))} \frac{\prod_{s \in \mathcal{A}} \Gamma(n(u, s) + \alpha(u, s))}{\Gamma(\alpha(u) + n(u))} \right\}$$

Using Bayes' theorem, the posterior now becomes (thanks to the choice of conjugate priors)

$$P(\theta|D) = \prod_{u \in \mathcal{A}} \left\{ \frac{\Gamma(n(u) + \alpha(u))}{\prod_{s \in \mathcal{A}} \Gamma(n(u, s) + \alpha(u, s))} \prod_{s \in \mathcal{A}} p(s|u)^{n(u,s)+\alpha(u,s)-1} \right\}$$

Since this is again a product of Dirichlet distributions, the marginalised distribution of a particular parameter  $P(s|u)$  of our chain is given by

$$P(s|u) \sim \text{Beta}(n(u, s) + \alpha(u, s), n(u) + \alpha(u) - n(u, s) - \alpha(u, s))$$

Thus, the MAP estimate  $\hat{\theta}$  is given by

$$\hat{\theta} = \left\{ \frac{n(u, s) + \alpha(u, s) - 1}{n(u) + \alpha(u) - |\mathcal{A}|}, s \in \mathcal{A}, u \in \mathcal{A} \right\}$$

The function also returns the expected value, given by

$$E_{\text{post}}p(s|u) = \left\{ \frac{n(u, s) + \alpha(u, s)}{n(u) + \alpha(u)}, s \in \mathcal{A}, u \in \mathcal{A} \right\}$$

The variance is given by

$$\text{Var}_{\text{post}}p(s|u) = \frac{n(u, s) + \alpha(u, s)}{(n(u) + \alpha(u))^2} \frac{n(u) + \alpha(u) - n(u, s) - \alpha(u, s)}{n(u) + \alpha(u) + 1}$$

The square root of this quantity is the standard error, which is returned by the function.

The confidence intervals are constructed by computing the inverse of the beta integral.

### *Predictive distribution*

Given the old data set, the probability of observing new data is  $P(D'|D)$  where  $D'$  is the new data set. Let  $m(u, s), m(u)$  denote the corresponding counts for the new data. Then,

$$P(D'|D) = \int P(D'|\theta)P(\theta|D)d\theta$$

We already know the expressions for both quantities in the integral and it turns out to be similar to evaluating the evidence

$$P(D'|D) = \prod_{u \in \mathcal{A}} \left\{ \frac{\Gamma(\alpha(u))}{\prod_{s \in \mathcal{A}} \Gamma(\alpha(u, s))} \frac{\prod_{s \in \mathcal{A}} \Gamma(n(u, s) + m(u, s) + \alpha(u, s))}{\Gamma(\alpha(u) + n(u) + m(u))} \right\}$$

### *Choosing the hyperparameters*

The hyperparameters model the shape of the parameters' prior distribution. These must be provided by the user. The package offers functionality to translate a given prior belief transition matrix into the hyperparameter matrix. It is assumed that this belief matrix corresponds to the mean value of the parameters. Since the relation

$$E_{\text{prior}}p(s|u) = \frac{\alpha(u, s)}{\alpha(u)}$$

holds, the function accepts as input the belief matrix as well as a scaling vector (serves as a proxy for  $\alpha(\cdot)$ ) and proceeds to compute  $\alpha(\cdot, \cdot)$ .

Alternatively, the function accepts a data sample and infers the hyperparameters from it. Since the mode of a parameter (with respect to the prior distribution) is proportional to one less than the corresponding hyperparameter, we set

$$\alpha(u, s) - 1 = m(u, s)$$

where  $m(u, s)$  is the  $u \rightarrow s$  transition count in the data sample. This is regarded as a 'fake count' which helps  $\alpha(u, s)$  to reflect knowledge of the data sample.

### Usage and examples

```
R> weatherStates <- c("sunny", "cloudy", "rain")
R> byRow <- TRUE
R> weatherMatrix <- matrix(data = c(0.7, 0.2, 0.1,
+                                0.3, 0.4, 0.3,
+                                0.2, 0.4, 0.4),
+                           byrow = byRow, nrow = 3,
+                           dimnames = list(weatherStates, weatherStates))
R> mcWeather <- new("markovchain", states = weatherStates,
+                  byrow = byRow, transitionMatrix = weatherMatrix,
+                  name = "Weather")
R> weathersOfDays <- rmarkovchain(n = 365, object = mcWeather, t0 = "sunny")
```

For the purpose of this section, we shall continue to use the weather of days example introduced in the main vignette of the package (reproduced above for convenience).

Let us invoke the fit function to estimate the MAP parameters with 92% confidence bounds and hyperparameters as shown below, based on the first 200 days of the weather data. Additionally, let us find out what the probability is of observing the weather data for the next 165 days. The usage would be as follows

```
R> hyperMatrix<-matrix(c(1, 1, 2,
+                       3, 2, 1,
+                       2, 2, 3),
+                      nrow = 3, byrow = TRUE,
+                      dimnames = list(weatherStates,weatherStates))
R> markovchainFit(weathersOfDays[1:200], method = "map",
+               confidencelevel = 0.92, hyperparam = hyperMatrix)
```

\$estimate

Bayesian Fit

A 3 - dimensional discrete Markov Chain defined by the following states:

cloudy, rain, sunny

The transition matrix (by rows) is defined as follows:

	cloudy	rain	sunny
cloudy	0.4307692	0.33846154	0.2307692
rain	0.2833333	0.48333333	0.2333333
sunny	0.2317073	0.09756098	0.6707317

\$expectedValue

	cloudy	rain	sunny
cloudy	0.4264706	0.3382353	0.2352941

```

rain    0.2857143 0.4761905 0.2380952
sunny   0.2352941 0.1058824 0.6588235

$standardError
      [,1]      [,2]      [,3]
[1,] 0.05953849 0.05695564 0.05106557
[2,] 0.05646924 0.06242910 0.05323971
[3,] 0.04574078 0.03317874 0.05112400

$confidenceInterval
$confidenceInterval$confidenceLevel
[1] 0.92

$confidenceInterval$lowerEndpointMatrix
      [,1]      [,2]      [,3]
[1,] 0.3405624 0.2485242 0.1431451
[2,] 0.1913584 0.3883767 0.1423703
[3,] 0.1530883 0.0000000 0.5856034

$confidenceInterval$upperEndpointMatrix
      [,1]      [,2]      [,3]
[1,] 0.5754446 0.451546 0.3209113
[2,] 0.3885752 1.000000 0.3275604
[3,] 0.3124846 0.155173 1.0000000

$logLikelihood
[1] -190.4026

R> predictiveDistribution(weathersOfDays[1:200],
+                          weathersOfDays[201:365],hyperparam = hyperMatrix)

[1] -161.8695

```

The results should not change after permuting the dimensions of the matrix.

```

R> hyperMatrix2<- hyperMatrix[c(2,3,1), c(2,3,1)]
R> markovchainFit(weathersOfDays[1:200], method = "map",
+                 confidencelevel = 0.92, hyperparam = hyperMatrix2)

$estimate
Bayesian Fit
A 3 - dimensional discrete Markov Chain defined by the following states:
cloudy, rain, sunny
The transition matrix (by rows) is defined as follows:
      cloudy      rain      sunny

```

```
cloudy 0.4307692 0.33846154 0.2307692
rain   0.28333333 0.48333333 0.2333333
sunny  0.2317073 0.09756098 0.6707317
```

```
$expectedValue
```

```
      cloudy      rain      sunny
cloudy 0.4264706 0.3382353 0.2352941
rain   0.2857143 0.4761905 0.2380952
sunny  0.2352941 0.1058824 0.6588235
```

```
$standardError
```

```
      [,1]      [,2]      [,3]
[1,] 0.05953849 0.05695564 0.05106557
[2,] 0.05646924 0.06242910 0.05323971
[3,] 0.04574078 0.03317874 0.05112400
```

```
$confidenceInterval
```

```
$confidenceInterval$confidenceLevel
```

```
[1] 0.92
```

```
$confidenceInterval$lowerEndpointMatrix
```

```
      [,1]      [,2]      [,3]
[1,] 0.3405624 0.2485242 0.1431451
[2,] 0.1913584 0.3883767 0.1423703
[3,] 0.1530883 0.0000000 0.5856034
```

```
$confidenceInterval$upperEndpointMatrix
```

```
      [,1]      [,2]      [,3]
[1,] 0.5754446 0.451546 0.3209113
[2,] 0.3885752 1.000000 0.3275604
[3,] 0.3124846 0.155173 1.0000000
```

```
$logLikelihood
```

```
[1] -190.4026
```

```
R> predictiveDistribution(weathersOfDays[1:200],
+                          weathersOfDays[201:365], hyperparam = hyperMatrix2)
```

```
[1] -161.8695
```

```
R>
```

Note that the predictive probability is very small. However, this can be useful when comparing model orders.

Suppose we have an idea of the (prior) transition matrix corresponding to the expected value of the parameters, and have a data set from which we want to deduce the MAP estimates. We can infer the hyperparameters from this known transition matrix itself, and use this to obtain our MAP estimates.

```
R> inferHyperparam(transMatr = weatherMatrix, scale = c(10, 10, 10))
```

```
$scaledInference
      cloudy rain sunny
cloudy      4    3     3
rain        4    4     2
sunny       2    1     7
```

Alternatively, we can use a data sample to infer the hyperparameters.

```
R> inferHyperparam(data = weathersOfDays[1:15])
```

```
$dataInference
      cloudy rain sunny
cloudy      1    3     1
rain        2    5     3
sunny       3    2     3
```

In order to use the inferred hyperparameter matrices, we do

```
R> hyperMatrix3 <- inferHyperparam(transMatr = weatherMatrix, scale = c(10, 10, 10))
R> hyperMatrix3 <- hyperMatrix3$scaledInference
R> hyperMatrix4 <- inferHyperparam(data = weathersOfDays[1:15])
R> hyperMatrix4 <- hyperMatrix4$dataInference
```

Now we can safely use `hyperMatrix3` and `hyperMatrix4` with `markovchainFit` (in the `hyperparam` argument).

Supposing we don't provide any hyperparameters, then the prior is uniform. This is the same as maximum likelihood.

```
R> data(preproglucacon)
R> preproglucacon <- preproglucacon[[2]]
R> MLEest <- markovchainFit(preproglucacon, method = "mle")
R> MAPest <- markovchainFit(preproglucacon, method = "map")
R> MLEest$estimate
```

MLE Fit

```
A 4 - dimensional discrete Markov Chain defined by the following states:
A, C, G, T
The transition matrix (by rows) is defined as follows:
      A          C          G          T
A 0.3585271 0.1434109 0.16666667 0.3313953
C 0.3840304 0.1558935 0.02281369 0.4372624
G 0.3053097 0.1991150 0.15044248 0.3451327
T 0.2844523 0.1819788 0.17667845 0.3568905
```

```
R> MAPest$estimate
```

```
Bayesian Fit
```

```
A 4 - dimensional discrete Markov Chain defined by the following states:
```

```
A, C, G, T
```

```
The transition matrix (by rows) is defined as follows:
```

	A	C	G	T
A	0.3585271	0.1434109	0.16666667	0.3313953
C	0.3840304	0.1558935	0.02281369	0.4372624
G	0.3053097	0.1991150	0.15044248	0.3451327
T	0.2844523	0.1819788	0.17667845	0.3568905

## 5.7. Higher Order Markov Chains

Continuous time Markov chains are discussed in the CTMC vignette which is a part of the package.

An experimental `fitHigherOrder` function has been written in order to fit a higher order Markov chain (Ching, Huang, Ng, and Siu (2013); Ching *et al.* (2008)). It takes a sequence and the order as arguments and returns the frequency probability vector  $X$  of the given sequence and the parameters  $\lambda_i$  with the transition probability matrices  $Q_i$  for each order  $i$ . Its quadratic programming problem is solved using `solnp` function of **Rsolnp**, Ghalanos and Theussl (2014).

```
R> library(Rsolnp)
```

```
R> data(rain)
```

```
R> fitHigherOrder(rain$rain, 2)
```

```
$lambda
```

```
[1] 0.5 0.5
```

```
$Q
```

```
$Q[[1]]
```

	0	1-5	6+
0	0.6605839	0.4625850	0.1976285
1-5	0.2299270	0.3061224	0.3122530
6+	0.1094891	0.2312925	0.4901186

```
$Q[[2]]
```

	0	1-5	6+
0	0.6021898	0.4489796	0.3412698
1-5	0.2445255	0.2687075	0.3214286
6+	0.1532847	0.2823129	0.3373016

```
$X
```

```

      0      1-5      6+
0.5000000 0.2691606 0.2308394

R> fitHigherOrder(rain$rain, 3)

$lambda
[1] 0.3333333 0.3333333 0.3333333

$Q
$Q[[1]]
      0      1-5      6+
0  0.6605839 0.4625850 0.1976285
1-5 0.2299270 0.3061224 0.3122530
6+  0.1094891 0.2312925 0.4901186

$Q[[2]]
      0      1-5      6+
0  0.6021898 0.4489796 0.3412698
1-5 0.2445255 0.2687075 0.3214286
6+  0.1532847 0.2823129 0.3373016

$Q[[3]]
      0      1-5      6+
0  0.5693431 0.4455782 0.4183267
1-5 0.2536496 0.2891156 0.2749004
6+  0.1770073 0.2653061 0.3067729

$X
      0      1-5      6+
0.5000000 0.2691606 0.2308394

```

## 5.8. Higher Order Multivariate Markov Chains

### Introduction

HOMMC model is used for modeling behaviour of multiple categorical sequences generated by similar sources. The main reference is [Ching \*et al.\* \(2008\)](#). Assume that there are  $s$  categorical sequences and each has possible states in  $M$ . In  $n$ th order MMC the state probability distribution of the  $j$ th sequence at time  $t = r + 1$  depend on the state probability distribution of all the sequences (including itself) at times  $t = r, r - 1, \dots, r - n + 1$ .

$$x_{r+1}^{(j)} = \sum_{k=1}^s \sum_{h=1}^n \lambda_{jk}^{(h)} P_h^{(jk)} x_{r-h+1}^{(k)}, j = 1, 2, \dots, s, r = n - 1, n, \dots \quad (19)$$

with initial distribution  $x_0^{(k)}, x_1^{(k)}, \dots, x_{n-1}^{(k)} (k = 1, 2, \dots, s)$ . Here

$$\lambda_{jk}^{(h)} \geq 0, 1 \leq j, k \leq s, 1 \leq h \leq n \text{ and } \sum_{k=1}^s \sum_{h=1}^n \lambda_{jk}^{(h)} = 1, j = 1, 2, 3, \dots, s. \quad (20)$$

Now we will see the simpler representation of the model which will help us understand the result of `fitHighOrderMultivarMC` method.

Let  $X_r^{(j)} = ((x_r^{(j)})^T, (x_{r-1}^{(j)})^T, \dots, (x_{r-n+1}^{(j)})^T)^T$  for  $j = 1, 2, 3, \dots, s$ . Then

$$\begin{pmatrix} X_{r+1}^{(1)} \\ X_{r+1}^{(2)} \\ \vdots \\ X_{r+1}^{(s)} \end{pmatrix} = \begin{pmatrix} B^{11} & B^{12} & \cdot & \cdot & B^{1s} \\ B^{21} & B^{22} & \cdot & \cdot & B^{2s} \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ B^{s1} & B^{s2} & \cdot & \cdot & B^{ss} \end{pmatrix} \begin{pmatrix} X_r^{(1)} \\ X_r^{(2)} \\ \cdot \\ \cdot \\ X_r^{(s)} \end{pmatrix} \text{ where}$$

$$B^{ii} = \begin{pmatrix} \lambda_{ii}^{(1)} P_1^{(ii)} & \lambda_{ii}^{(2)} P_2^{(ii)} & \cdot & \cdot & \lambda_{ii}^{(n)} P_n^{(ii)} \\ I & 0 & \cdot & \cdot & 0 \\ 0 & I & \cdot & \cdot & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & \cdot & \cdot & I & 0 \end{pmatrix}_{mn*mn} \text{ and}$$

$$B^{ij} = \begin{pmatrix} \lambda_{ij}^{(1)} P_1^{(ij)} & \lambda_{ij}^{(2)} P_2^{(ij)} & \cdot & \cdot & \lambda_{ij}^{(n)} P_n^{(ij)} \\ 0 & 0 & \cdot & \cdot & 0 \\ 0 & 0 & \cdot & \cdot & 0 \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ \cdot & \cdot & \cdot & \cdot & \cdot \\ 0 & \cdot & \cdot & 0 & 0 \end{pmatrix}_{mn*mn} \text{ when } i \neq j.$$

*Representation of parameters in the code*

$P_h^{(ij)}$  is represented as  $Ph(i, j)$  and  $\lambda_{ij}^{(h)}$  as `Lambdah(i,j)`. For example:  $P_2^{(13)}$  as  $P2(1, 3)$  and  $\lambda_{45}^{(3)}$  as `Lambda3(4,5)`.

*Definition of HOMMC class*

```
Class "hommc" [package "markovchain"]
```

```
Slots:
```

Name:	order	states	P	Lambda	byrow	name
Class:	numeric	character	array	numeric	logical	character

Any element of `hommc` class is comprised by following slots:

1. `states`: a character vector, listing the states for which transition probabilities are defined.
2. `byrow`: a logical element, indicating whether transition probabilities are shown by row or by column.
3. `order`: order of Multivariate Markov chain.
4. `P`: an array of all transition matrices.
5. `Lambda`: a vector to store the weightage of each transition matrix.
6. `name`: optional character element to name the HOMMC

*How to create an object of class HOMMC*

```
R> states <- c('a', 'b')
R> P <- array(dim = c(2, 2, 4), dimnames = list(states, states))
R> P[ , , 1] <- matrix(c(1/3, 2/3, 1, 0), byrow = FALSE, nrow = 2, ncol = 2)
R> P[ , , 2] <- matrix(c(0, 1, 1, 0), byrow = FALSE, nrow = 2, ncol = 2)
R> P[ , , 3] <- matrix(c(2/3, 1/3, 0, 1), byrow = FALSE, nrow = 2, ncol = 2)
R> P[ , , 4] <- matrix(c(1/2, 1/2, 1/2, 1/2), byrow = FALSE, nrow = 2, ncol = 2)
R> Lambda <- c(.8, .2, .3, .7)
R> hob <- new("hommc", order = 1, Lambda = Lambda, P = P, states = states,
+           byrow = FALSE, name = "FOMMC")
R> hob
```

```
Order of multivariate markov chain = 1
states = a b
```

List of Lambda's and the corresponding transition matrix (by cols) :

```
Lambda1(1,1) : 0.8
```

```
P1(1,1) :
```

```
  a b
```

```
a 0.3333333 1
```

```
b 0.6666667 0
```

```
Lambda1(1,2) : 0.2
```

```
P1(1,2) :
```

```
  a b
```

```
a 0 1
```

```
b 1 0
```

```
Lambda1(2,1) : 0.3
```

```
P1(2,1) :
```

```
  a b
```

```
a 0.6666667 0
```

```
b 0.3333333 1
```

```
Lambda1(2,2) : 0.7
```

```
P1(2,2) :
```

```
      a    b
a 0.5 0.5
b 0.5 0.5
```

### *Fit HOMMC*

`fitHighOrderMultivarMC` method is available to fit HOMMC. Below are the 3 parameters of this method.

1. `seqMat`: a character matrix or a data frame, each column represents a categorical sequence.
2. `order`: order of Multivariate Markov chain. Default is 2.
3. `Norm`: Norm to be used. Default is 2.

## 6. Applications

This section shows applications of DTMC in various fields.

### 6.1. Weather forecasting

Markov chains provide a simple model to predict the next day's weather given the current meteorological condition. The first application herewith shown is the "Land of Oz example" from [J. G. Kemeny, J. L. Snell, and G. L. Thompson \(1974\)](#), the second is the "Alofi Island Rainfall" from [P. J. Avery and D. A. Henderson \(1999\)](#).

#### *Land of Oz*

The Land of Oz is acknowledged not to have ideal weather conditions at all: the weather is snowy or rainy very often and, once more, there are never two nice days in a row. Consider three weather states: rainy, nice and snowy. Let the transition matrix be as in the following:

```
R> mcWP <- new("markovchain", states = c("rainy", "nice", "snowy"),
+           transitionMatrix = matrix(c(0.5, 0.25, 0.25,
+                                     0.5, 0, 0.5,
+                                     0.25, 0.25, 0.5), byrow = T, nrow = 3))
```

Given that today it is a nice day, the corresponding stochastic row vector is  $w_0 = (0, 1, 0)$  and the forecast after 1, 2 and 3 days are given by

```
R> W0 <- t(as.matrix(c(0, 1, 0)))
R> W1 <- W0 * mcWP; W1
```

```

      rainy nice snowy
[1,]  0.5    0    0.5

```

```
R> W2 <- W0 * (mcWP ^ 2); W2
```

```

      rainy nice snowy
[1,] 0.375 0.25 0.375

```

```
R> W3 <- W0 * (mcWP ^ 3); W3
```

```

      rainy   nice   snowy
[1,] 0.40625 0.1875 0.40625

```

As can be seen from  $w_1$ , if in the Land of Oz today is a nice day, tomorrow it will rain or snow with probability 1. One week later, the prediction can be computed as

```
R> W7 <- W0 * (mcWP ^ 7)
R> W7
```

```

      rainy      nice      snowy
[1,] 0.4000244 0.1999512 0.4000244

```

The steady state of the chain can be computed by means of the `steadyStates` method.

```
R> q <- steadyStates(mcWP)
R> q
```

```

      rainy nice snowy
[1,]  0.4  0.2  0.4

```

Note that, from the seventh day on, the predicted probabilities are substantially equal to the steady state of the chain and they don't depend from the starting point, as the following code shows.

```
R> R0 <- t(as.matrix(c(1, 0, 0)))
R> R7 <- R0 * (mcWP ^ 7); R7
```

```

      rainy      nice      snowy
[1,] 0.4000244 0.2000122 0.3999634

```

```
R> S0 <- t(as.matrix(c(0, 0, 1)))
R> S7 <- S0 * (mcWP ^ 7); S7
```

```

      rainy      nice      snowy
[1,] 0.3999634 0.2000122 0.4000244

```

*Alofi Island Rainfall*

Alofi Island daily rainfall data were recorded from January 1st, 1987 until December 31st, 1989 and classified into three states: "0" (no rain), "1-5" (from non zero until 5 mm) and "6+" (more than 5mm). The corresponding dataset is provided within the **markovchain** package.

```
R> data("rain", package = "markovchain")
R> table(rain$rain)
```

```
  0 1-5 6+
548 295 253
```

The underlying transition matrix is estimated as follows.

```
R> mcAlofi <- markovchainFit(data = rain$rain, name = "Alofi MC")$estimate
R> mcAlofi
```

Alofi MC

A 3 - dimensional discrete Markov Chain defined by the following states:

0, 1-5, 6+

The transition matrix (by rows) is defined as follows:

	0	1-5	6+
0	0.6605839	0.2299270	0.1094891
1-5	0.4625850	0.3061224	0.2312925
6+	0.1976285	0.3122530	0.4901186

The long term daily rainfall distribution is obtained by means of the **steadyStates** method.

```
R> steadyStates(mcAlofi)
```

```
      0      1-5      6+
[1,] 0.5008871 0.2693656 0.2297473
```

## 6.2. Finance and Economics

Other relevant applications of DTMC can be found in Finance and Economics.

*Finance*

Credit ratings transitions have been successfully modelled with discrete time Markov chains. Some rating agencies publish transition matrices that show the empirical transition probabilities across credit ratings. The example that follows comes from **CreditMetrics** R package ([Wittmann 2007](#)), carrying Standard & Poor's published data.

```
R> rc <- c("AAA", "AA", "A", "BBB", "BB", "B", "CCC", "D")
R> creditMatrix <- matrix(c(90.81, 8.33, 0.68, 0.06, 0.08, 0.02, 0.01, 0.01,
```

```

+ 0.70, 90.65, 7.79, 0.64, 0.06, 0.13, 0.02, 0.01,
+ 0.09, 2.27, 91.05, 5.52, 0.74, 0.26, 0.01, 0.06,
+ 0.02, 0.33, 5.95, 85.93, 5.30, 1.17, 1.12, 0.18,
+ 0.03, 0.14, 0.67, 7.73, 80.53, 8.84, 1.00, 1.06,
+ 0.01, 0.11, 0.24, 0.43, 6.48, 83.46, 4.07, 5.20,
+ 0.21, 0, 0.22, 1.30, 2.38, 11.24, 64.86, 19.79,
+ 0, 0, 0, 0, 0, 0, 0, 100
+ )/100, 8, 8, dimnames = list(rc, rc), byrow = TRUE)

```

It is easy to convert such matrices into **markovchain** objects and to perform some analyses

```

R> creditMc <- new("markovchain", transitionMatrix = creditMatrix,
+                  name = "S&P Matrix")
R> absorbingStates(creditMc)

[1] "D"

```

### *Economics*

For a recent application of **markovchain** in Economic, see [Jacob \(2014\)](#).

A dynamic system generates two kinds of economic effects ([Bard 2000](#)):

1. those incurred when the system is in a specified state, and
2. those incurred when the system makes a transition from one state to another.

Let the monetary amount of being in a particular state be represented as a  $m$ -dimensional column vector  $c^S$ , while let the monetary amount of a transition be embodied in a  $C^R$  matrix in which each component specifies the monetary amount of going from state  $i$  to state  $j$  in a single step. Henceforth, Equation 21 represents the monetary of being in state  $i$ .

$$c_i = c_i^S + \sum_{j=1}^m C_{ij}^R p_{ij}. \quad (21)$$

Let  $\bar{c} = [c_i]$  and let  $e_i$  be the vector valued 1 in the initial state and 0 in all other, then, if  $f_n$  is the random variable representing the economic return associated with the stochastic process at time  $n$ , Equation 22 holds:

$$E[f_n(X_n) | X_0 = i] = e_i P^n \bar{c}. \quad (22)$$

The following example assumes that a telephone company models the transition probabilities between customer/non-customer status by matrix  $P$  and the cost associated to states by matrix  $M$ .

```

R> statesNames <- c("customer", "non customer")
R> P <- zeros(2); P[1, 1] <- .9; P[1, 2] <- .1; P[2, 2] <- .95; P[2, 1] <- .05;
R> rownames(P) <- statesNames; colnames(P) <- statesNames
R> mcP <- new("markovchain", transitionMatrix = P, name = "Telephone company")
R> M <- zeros(2); M[1, 1] <- -20; M[1, 2] <- -30; M[2, 1] <- -40; M[2, 2] <- 0

```

If the average revenue for existing customer is +100, the cost per state is computed as follows.

```
R> c1 <- 100 + conditionalDistribution(mcP, state = "customer") %*% M[1,]
R> c2 <- 0 + conditionalDistribution(mcP, state = "non customer") %*% M[2,]
```

For an existing customer, the expected gain (loss) at the fifth year is given by the following code.

```
R> as.numeric((c(1, 0)* mcP ^ 5) %*% (as.vector(c(c1, c2))))
```

```
[1] 48.96009
```

### 6.3. Marketing

We tried to replicate the example found in [Ching \*et al.\* \(2008\)](#) for an application of HOMMC. A soft-drink company in Hong Kong is facing an in-house problem of production planning and inventory control. A pressing issue is the storage space of its central warehouse, which often finds itself in the state of overflow or near capacity. The company is thus in urgent needs to study the interplay between the storage space requirement and the overall growing sales demand. The product can be classified into six possible states (1, 2, 3, 4, 5, 6) according to their sales volumes. All products are labeled as 1 = no sales volume, 2 = very slow-moving (very low sales volume), 3 = slow-moving, 4 = standard, 5 = fast-moving or 6 = very fast-moving (very high sales volume). Such labels are useful from both marketing and production planning points of view. The data is contained in `sales` object.

```
R> data(sales)
R> head(sales)
```

	A	B	C	D	E
[1,]	"6"	"1"	"6"	"6"	"6"
[2,]	"6"	"6"	"6"	"2"	"2"
[3,]	"6"	"6"	"6"	"2"	"2"
[4,]	"6"	"1"	"6"	"2"	"2"
[5,]	"2"	"6"	"6"	"2"	"2"
[6,]	"6"	"1"	"6"	"3"	"3"

The company would also like to predict sales demand for an important customer in order to minimize its inventory build-up. More importantly, the company can understand the sales pattern of this customer and then develop a marketing strategy to deal with this customer. Customer's sales demand sequences of five important products of the company for a year. We expect sales demand sequences generated by the same customer to be correlated to each other. Therefore by exploring these relationships, one can obtain a better higher-order multivariate Markov model for such demand sequences, hence obtain better prediction rules.

In [Ching \*et al.\* \(2008\)](#) application, they choose the order arbitrarily to be eight, i.e.,  $n = 8$ . We first estimate all the transition probability matrices  $P_h^{(ij)}$  and we also have the estimates of the stationary probability distributions of the five products:.

$$\hat{\mathbf{x}}^{(1)} = (0.0818 \quad 0.4052 \quad 0.0483 \quad 0.0335 \quad 0.0037 \quad 0.4275)^T$$

$$\hat{\mathbf{x}}^{(2)} = (0.3680 \quad 0.1970 \quad 0.0335 \quad 0.0000 \quad 0.0037 \quad 0.3978)^T$$

$$\hat{\mathbf{x}}^{(3)} = (0.1450 \quad 0.2045 \quad 0.0186 \quad 0.0000 \quad 0.0037 \quad 0.6283)^T$$

$$\hat{\mathbf{x}}^{(4)} = (0.0000 \quad 0.3569 \quad 0.1338 \quad 0.1896 \quad 0.0632 \quad 0.2565)^T$$

$$\hat{\mathbf{x}}^{(5)} = (0.0000 \quad 0.3569 \quad 0.1227 \quad 0.2268 \quad 0.0520 \quad 0.2416)^T$$

By solving the corresponding linear programming problems, we obtain the following higher-order multivariate Markov chain model:

$$\mathbf{x}_{r+1}^{(1)} = \mathbf{P}_1^{(12)} \mathbf{x}_r^{(2)}$$

$$\mathbf{x}_{r+1}^{(2)} = 0.6364 \mathbf{P}_1^{(22)} \mathbf{x}_r^{(2)} + 0.3636 \mathbf{P}_3^{(22)} \mathbf{x}_r^{(2)}$$

$$\mathbf{x}_{r+1}^{(3)} = \mathbf{P}_1^{(35)} \mathbf{x}_r^{(5)}$$

$$\mathbf{x}_{r+1}^{(4)} = 0.2994 \mathbf{P}_8^{(42)} \mathbf{x}_r^{(2)} + 0.4324 \mathbf{P}_1^{(45)} \mathbf{x}_r^{(5)} + 0.2681 \mathbf{P}_2^{(45)} \mathbf{x}_r^{(5)}$$

$$\mathbf{x}_{r+1}^{(5)} = 0.2718 \mathbf{P}_8^{(52)} \mathbf{x}_r^{(2)} + 0.6738 \mathbf{P}_1^{(54)} \mathbf{x}_r^{(4)} + 0.0544 \mathbf{P}_2^{(55)} \mathbf{x}_r^{(5)}$$

According to the constructed 8th order multivariate Markov model, Products A and B are closely related. In particular, the sales demand of Product A depends strongly on Product B. The main reason is that the chemical nature of Products A and B is the same, but they have different packaging for marketing purposes. Moreover, Products B, C, D and E are closely related. Similarly, products C and E have the same product flavor, but different packaging. In this model, it is interesting to note that both Product D and E quite depend on Product B at order of 8, this relationship is hardly to be obtained in conventional Markov model owing to huge amount of parameters. The results show that higher-order multivariate Markov model is quite significant to analyze the relationship of sales demand.

```
R> # fit 8th order multivariate markov chain
R> object <- fitHighOrderMultivarMC(sales, order = 8, Norm = 2)
```

We choose to show only results shown in the paper. We see that  $\lambda$  values are quite close, but not equal, to those shown in the original paper.

```
Order of multivariate markov chain = 8
```

```
states = 1 2 3 4 5 6
```

List of Lambda's and the corresponding transition matrix (by cols) :

```
Lambda1(1,2) : 0.9999989
```

```
P1(1,2) :
```

	1	2	3	4	5	6
1	0.06060606	0.1509434	0.0000000	0.1666667	0	0.07547170

```

2 0.44444444 0.4716981 0.44444444 0.1666667 1 0.33018868
3 0.01010101 0.1320755 0.2222222 0.1666667 0 0.02830189
4 0.01010101 0.0754717 0.2222222 0.1666667 0 0.01886792
5 0.01010101 0.0000000 0.0000000 0.1666667 0 0.00000000
6 0.46464646 0.1698113 0.1111111 0.1666667 0 0.54716981

```

Lambda1(2,2) : 0.4812247

P1(2,2) :

	1	2	3	4	5	6
1	0.40404040	0.20754717	0.00000000	0.1666667	1	0.433962264
2	0.11111111	0.47169811	0.3333333	0.1666667	0	0.132075472
3	0.02020202	0.05660377	0.3333333	0.1666667	0	0.009433962
4	0.00000000	0.00000000	0.00000000	0.1666667	0	0.000000000
5	0.00000000	0.00000000	0.1111111	0.1666667	0	0.000000000
6	0.46464646	0.26415094	0.2222222	0.1666667	0	0.424528302

Lambda3(2,2) : 0.3870364

P3(2,2) :

	1	2	3	4	5	6
1	0.40404040	0.16981132	0.3333333	0.1666667	0	0.44230769
2	0.18181818	0.33962264	0.2222222	0.1666667	0	0.14423077
3	0.03030303	0.05660377	0.0000000	0.1666667	0	0.02884615
4	0.00000000	0.00000000	0.0000000	0.1666667	0	0.00000000
5	0.00000000	0.00000000	0.1111111	0.1666667	0	0.00000000
6	0.38383838	0.43396226	0.3333333	0.1666667	1	0.38461538

Lambda1(3,5) : 0.676394

P1(3,5) :

	1	2	3	4	5	6
1	0.1666667	0.09473684	0.1515152	0.1639344	0.07142857	0.21538462
2	0.1666667	0.18947368	0.2727273	0.2295082	0.14285714	0.18461538
3	0.1666667	0.04210526	0.0000000	0.0000000	0.00000000	0.01538462
4	0.1666667	0.00000000	0.0000000	0.0000000	0.00000000	0.00000000
5	0.1666667	0.01052632	0.0000000	0.0000000	0.00000000	0.00000000
6	0.1666667	0.66315789	0.5757576	0.6065574	0.78571429	0.58461538

Lambda8(4,2) : 0.2729107

P8(4,2) :

	1	2	3	4	5	6
1	0.00000000	0.00000000	0.0000000	0.1666667	0	0.00000000
2	0.34343434	0.18867925	0.6666667	0.1666667	0	0.42424242
3	0.10101010	0.16981132	0.0000000	0.1666667	1	0.14141414
4	0.20202020	0.22641509	0.1111111	0.1666667	0	0.17171717
5	0.08080808	0.09433962	0.1111111	0.1666667	0	0.03030303
6	0.27272727	0.32075472	0.1111111	0.1666667	0	0.23232323

Lambda1(4,5) : 0.2293906

P1(4,5) :

	1	2	3	4	5	6
1	0.1666667	0.00000000	0.00000000	0.00000000	0.00000000	0.00000000
2	0.1666667	0.47368421	0.21212121	0.03278689	0.00000000	0.64615385
3	0.1666667	0.10526316	0.21212121	0.19672131	0.07142857	0.09230769
4	0.1666667	0.00000000	0.24242424	0.54098361	0.57142857	0.03076923
5	0.1666667	0.01052632	0.03030303	0.18032787	0.28571429	0.00000000
6	0.1666667	0.41052632	0.30303030	0.04918033	0.07142857	0.23076923

Lambda2(4,5) : 0.2989146

P2(4,5) :

	1	2	3	4	5	6
1	0.1666667	0.00000000	0.00000000	0.00000000	0.00000000	0.00000000
2	0.1666667	0.55319149	0.36363636	0.06557377	0.00000000	0.41538462
3	0.1666667	0.13829787	0.09090909	0.21311475	0.28571429	0.04615385
4	0.1666667	0.05319149	0.24242424	0.40983607	0.64285714	0.06153846
5	0.1666667	0.02127660	0.06060606	0.16393443	0.07142857	0.03076923
6	0.1666667	0.23404255	0.24242424	0.14754098	0.00000000	0.44615385

Lambda8(5,2) : 0.2268906

P8(5,2) :

	1	2	3	4	5	6
1	0.00000000	0.00000000	0.00000000	0.1666667	0	0.00000000
2	0.35353535	0.20754717	0.6666667	0.1666667	1	0.39393939
3	0.10101010	0.15094340	0.00000000	0.1666667	0	0.13131313
4	0.22222222	0.30188679	0.22222222	0.1666667	0	0.20202020
5	0.09090909	0.03773585	0.00000000	0.1666667	0	0.03030303
6	0.23232323	0.30188679	0.11111111	0.1666667	0	0.24242424

Lambda1(5,4) : 0.2268058

P1(5,4) :

	1	2	3	4	5	6
1	0.1666667	0.00000000	0.00000000	0.00000000	0.00000000	0.00000000
2	0.1666667	0.48421053	0.16666667	0.01960784	0.05882353	0.60869565
3	0.1666667	0.10526316	0.16666667	0.15686275	0.05882353	0.11594203
4	0.1666667	0.00000000	0.44444444	0.62745098	0.64705882	0.02898551
5	0.1666667	0.01052632	0.02777778	0.15686275	0.23529412	0.00000000
6	0.1666667	0.40000000	0.19444444	0.03921569	0.00000000	0.24637681

Lambda2(5,5) : 0.5398433

P2(5,5) :

	1	2	3	4	5	6
1	0.1666667	0.00000000	0.00000000	0.00000000	0.00000000	0.00000000
2	0.1666667	0.52127660	0.42424242	0.04918033	0.07142857	0.43076923
3	0.1666667	0.12765957	0.03030303	0.19672131	0.21428571	0.07692308
4	0.1666667	0.05319149	0.33333333	0.54098361	0.50000000	0.07692308
5	0.1666667	0.02127660	0.03030303	0.11475410	0.21428571	0.01538462

6 0.1666667 0.27659574 0.18181818 0.09836066 0.00000000 0.40000000

## 6.4. Actuarial science

Markov chains are widely applied in the field of actuarial science. Two classical applications are policyholders' distribution across Bonus Malus classes in Motor Third Party Liability (MTPL) insurance (Section 6.4.1) and health insurance pricing and reserving (Section 6.4.2).

### *MTPL Bonus Malus*

Bonus Malus (BM) contracts grant the policyholder a discount (enworsen) as a function of the number of claims in the experience period. The discount (enworsen) is applied on a premium that already allows for known (a priori) policyholder characteristics (Denuit, Maréchal, Pitrebois, and Walhin 2007) and it usually depends on vehicle, territory, the demographic profile of the policyholder, and policy coverages deep (deductible and policy limits).

Since the proposed BM level depends on the claim on the previous period, it can be modelled by a discrete Markov chain. A very simplified example follows. Assume a BM scale from 1 to 5, where 4 is the starting level. The evolution rules are shown in Equation 23:

$$bm_{t+1} = \max(1, bm_t - 1) * (\tilde{N} = 0) + \min(5, bm_t + 2 * \tilde{N}) * (\tilde{N} \geq 1). \quad (23)$$

The number of claim  $\tilde{N}$  is a random variable that is assumed to be Poisson distributed.

```
R> getBonusMalusMarkovChain <- function(lambda)
+ {
+   bmMatr <- zeros(5)
+   bmMatr[1, 1] <- dpois(x = 0, lambda)
+   bmMatr[1, 3] <- dpois(x = 1, lambda)
+   bmMatr[1, 5] <- 1 - ppois(q = 1, lambda)
+
+   bmMatr[2, 1] <- dpois(x = 0, lambda)
+   bmMatr[2, 4] <- dpois(x = 1, lambda)
+   bmMatr[2, 5] <- 1 - ppois(q = 1, lambda)
+
+   bmMatr[3, 2] <- dpois(x = 0, lambda)
+   bmMatr[3, 5] <- 1 - dpois(x=0, lambda)
+
+   bmMatr[4, 3] <- dpois(x = 0, lambda)
+   bmMatr[4, 5] <- 1 - dpois(x = 0, lambda)
+
+   bmMatr[5, 4] <- dpois(x = 0, lambda)
+   bmMatr[5, 5] <- 1 - dpois(x = 0, lambda)
+   stateNames <- as.character(1:5)
+   out <- new("markovchain", transitionMatrix = bmMatr,
+             states = stateNames, name = "BM Matrix")
+   return(out)
```

```
+ }
R>
```

Assuming that the a-priori claim frequency per car-year is 0.05 in the class (being the class the group of policyholders that share the same common characteristics), the underlying BM transition matrix and its underlying steady state are as follows.

```
R> bmMc <- getBonusMalusMarkovChain(0.05)
R> as.numeric(steadyStates(bmMc))
```

```
[1] 0.895836079 0.045930498 0.048285405 0.005969247 0.003978772
```

If the underlying BM coefficients of the class are 0.5, 0.7, 0.9, 1.0, 1.25, this means that the average BM coefficient applied on the long run to the class is given by

```
R> sum(as.numeric(steadyStates(bmMc)) * c(0.5, 0.7, 0.9, 1, 1.25))
```

```
[1] 0.534469
```

This means that the average premium paid by policyholders in the portfolio almost halves in the long run.

### *Health insurance example*

Actuaries quantify the risk inherent in insurance contracts evaluating the premium of insurance contract to be sold (therefore covering future risk) and evaluating the actuarial reserves of existing portfolios (the liabilities in terms of benefits or claims payments due to policyholder arising from previously sold contracts). Key quantities of actuarial interest are: the expected present value of future benefits,  $PVFB$ , the (periodic) benefit premium,  $P$ , and the present value of future premium  $PVFP$ . A level benefit premium could be set equating at the beginning of the contract  $PVFB = PVFP$ . After the beginning of the contract the benefit reserve is the difference between  $PVFB$  and  $PVFP$ . The example comes from [Deshmukh \(2012\)](#). The interest rate is 5%, benefits are payable upon death (1000) and disability (500). Premiums are payable at the beginning of period only if the policyholder is active. The contract term is three years.

```
R> mcHI <- new("markovchain", states = c("active", "disable", "withdrawn",
+                                       "death"),
+           transitionMatrix = matrix(c(0.5, .25, .15, .1,
+                                       0.4, 0.4, 0.0, 0.2,
+                                       0, 0, 1, 0,
+                                       0, 0, 0, 1), byrow = TRUE, nrow = 4))
R> benefitVector <- as.matrix(c(0, 0, 500, 1000))
```

The policyholders is active at  $T_0$ . Therefore the expected states at  $T_1, \dots, T_3$  are calculated in the following.

```
R> T0 <- t(as.matrix(c(1, 0, 0, 0)))
R> T1 <- T0 * mcHI
R> T2 <- T1 * mcHI
R> T3 <- T2 * mcHI
```

The present value of future benefit at T0 is given by

```
R> PVFB <- T0 %%% benefitVector * 1.05 ^ -0 +
+ T1 %%% benefitVector * 1.05 ^ -1 +
+ T2 %%% benefitVector * 1.05 ^ -2 + T3 %%% benefitVector * 1.05 ^ -3
```

The yearly premium payable whether the insured is alive is as follows.

```
R> P <- PVFB / (T0[1] * 1.05 ^ -0 + T1[1] * 1.05 ^ -1 + T2[1] * 1.05 ^ -2)
```

The reserve at the beginning of the second year, in the case of the insured being alive, is as follows.

```
R> PVFB <- T2 %%% benefitVector * 1.05 ^ -1 + T3 %%% benefitVector * 1.05 ^ -2
R> PVFP <- P*(T1[1] * 1.05 ^ -0 + T2[1] * 1.05 ^ -1)
R> V <- PVFB - PVFP
R> V
```

```
      [,1]
[1,] 300.2528
```

An applied example can be performed using the data from [De Angelis, Paolo and Di Falco, L. \(2016\)](#) that has been saved in the `exdata` folder.

```
R> ltcDemoPath<-system.file("extdata", "ltdItaData.txt", package = "markovchain")
R> ltcDemo<-read.table(file = ltcDemoPath, header=TRUE, sep=";", dec = ".")
R> head(ltcDemo)
```

	age	pAD	pID	pAI	pAA
1	20	0.0004616002	0.01083364	0.0001762467	0.9993622
2	21	0.0004824888	0.01079719	0.0001710577	0.9993465
3	22	0.0004949938	0.01177076	0.0001592333	0.9993458
4	23	0.0005042935	0.01159394	0.0001605731	0.9993351
5	24	0.0005074193	0.01260574	0.0001606504	0.9993319
6	25	0.0005154267	0.01526364	0.0001643603	0.9993202

## 6.5. Sociology

Markov chains have been actively used to model progressions and regressions between social classes. The first study was performed by [Glass and Hall \(1954\)](#), while a more recent application can be found in [Jo Blanden and Machin \(2005\)](#). The table that follows shows the income quartile of the father when the son was 16 (in 1984) and the income quartile of the son when aged 30 (in 2000) for the 1970 cohort.

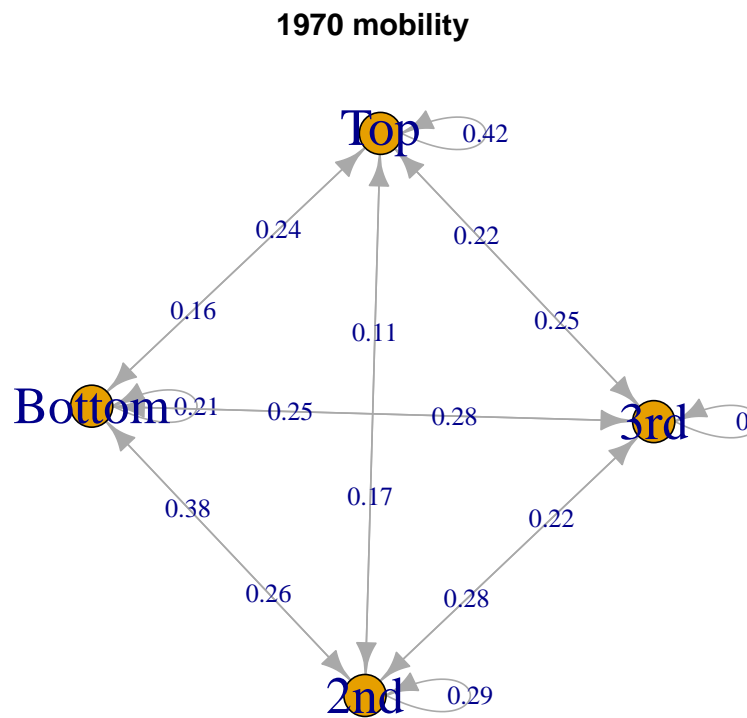


Figure 5: 1970 UK cohort mobility data.

```

R> data("blanden")
R> mobilityMc <- as(blanden, "markovchain")
R> mobilityMc

```

Unnamed Markov chain

A 4 - dimensional discrete Markov Chain defined by the following states:

Bottom, 2nd, 3rd, Top

The transition matrix (by rows) is defined as follows:

	2nd	3rd	Bottom	Top
Bottom	0.2900000	0.2200000	0.3800000	0.1100000
2nd	0.2772277	0.2574257	0.2475248	0.2178218
3rd	0.2626263	0.2828283	0.2121212	0.2424242
Top	0.1700000	0.2500000	0.1600000	0.4200000

The underlying transition graph is plotted in Figure 5.

The steady state distribution is computed as follows. Since transition across quartiles are shown, the probability function is evenly 0.25.

	Bottom	2nd	3rd	Top
[1,]	0.25	0.25	0.25	0.25

This section contains two examples: the first shows the use of Markov chain models in genetics, the second shows an application of Markov chains in modelling diseases' dynamics.

P. J. Avery and D. A. Henderson (1999) discusses the use of Markov chains in model Preproglucacon gene protein bases sequence. The `preproglucacon` dataset in `markovchain` contains the dataset shown in the package.

It is possible to model the transition probabilities between bases as shown in the following code.

```

Preproglucacon MC
  A 4 - dimensional discrete Markov Chain defined by the following states:
  A, C, G, T
  The transition matrix (by rows) is defined as follows:
      A          C          G          T
A 0.3585271 0.1434109 0.16666667 0.3313953
C 0.3840304 0.1558935 0.02281369 0.4372624
G 0.3053097 0.1991150 0.15044248 0.3451327
T 0.2844523 0.1819788 0.17667845 0.3568905

```

Discrete-time Markov chains are also employed to study the progression of chronic diseases. The following example is taken from [B. A. Craig and A. A. Sendi \(2002\)](#). Starting from six month follow-up data, the maximum likelihood estimation of the monthly transition matrix is obtained. This transition matrix aims to describe the monthly progression of CD4-cell counts of HIV infected subjects.

[illegible]

```

R> hivStates <- c("0-49", "50-74", "75-UP")
R> rownames(craigSendiMatr) <- hivStates
R> colnames(craigSendiMatr) <- hivStates
R> craigSendiTable <- as.table(craigSendiMatr)
R> mcM6 <- as(craigSendiTable, "markovchain")
R> mcM6@name <- "Zero-Six month CD4 cells transition"
R> mcM6

```

Zero-Six month CD4 cells transition

A 3 - dimensional discrete Markov Chain defined by the following states:

0-49, 50-74, 75-UP

The transition matrix (by rows) is defined as follows:

	0-49	50-74	75-UP
0-49	0.9216216	0.04459459	0.03378378
50-74	0.5811321	0.24150943	0.17735849
75-UP	0.2345679	0.23456790	0.53086420

As shown in the paper, the second passage consists in the decomposition of  $M_6 = V \cdot D \cdot V^{-1}$  in order to obtain  $M_1$  as  $M_1 = V \cdot D^{1/6} \cdot V^{-1}$ .

```

R> eig <- eigen(mcM6@transitionMatrix)
R> D <- diag(eig$values)

```

```

R> V <- eig$vectors
R> V %*% D %*% solve(V)

```

	[,1]	[,2]	[,3]
[1,]	0.9216216	0.04459459	0.03378378
[2,]	0.5811321	0.24150943	0.17735849
[3,]	0.2345679	0.23456790	0.53086420

```

R> d <- D ^ (1/6)
R> M <- V %*% d %*% solve(V)
R> mcM1 <- new("markovchain", transitionMatrix = M, states = hivStates)

```

## 7. Discussion, issues and future plans

The **markovchain** package has been designed in order to provide easily handling of DTMC and communication with alternative packages.

Some numerical issues have been found when working with matrix algebra using R internal linear algebra kernel (the same calculations performed with MATLAB gave a more accurate result). Some temporary workarounds have been implemented. For example, the condition for row/column sums to be equal to one is valid up to fifth decimal. Similarly, when extracting the eigenvectors only the real part is taken.

Such limitations are expected to be overcome in future releases. Similarly, future versions of the package are expected to improve the code in terms of numerical accuracy and rapidity. An initial rewriting of internal function in C++ by means of **Rcpp** package (Eddelbuettel 2013) has been started.

## Aknowledgments

The package was selected for Google Summer of Code 2015 support. The authors wish to thank Michael Cole, Tobi Gutman and Mildenerger Thoralf for their suggestions and bug checks. A final thanks also to Dr. Simona C. Minotti and Dr. Mirko Signorelli for their support in drafting this version of the vignettes.

## References

- Allaire J, Francois R, Ushey K, Vandenbrouck G, Geelnard M, Intel (2016). *RcppParallel: Parallel Programming Tools for 'Rcpp'*. R package version 4.3.19, URL <http://rcppcore.github.io/RcppParallel/>.
- Anderson TW, Goodman LA (1957). “Statistical inference about Markov chains.” *The Annals of Mathematical Statistics*, pp. 89–110.
- B A Craig, A A Sendi (2002). “Estimation of the Transition Matrix of a Discrete-Time Markov Chain.” *Health Economics*, **11**, 33–42.
- Bard JF (2000). “Lecture 12.5 - Additional Issues Concerning Discrete-Time Markov Chains.” URL [http://www.me.utexas.edu/~jensen%20ORMM/instruction/powerpoint/or\\_models\\_09/12.5\\_dtmc2.ppt](http://www.me.utexas.edu/~jensen%20ORMM/instruction/powerpoint/or_models_09/12.5_dtmc2.ppt).
- Brémaud P (1999). “Discrete-Time Markov Models.” In *Markov Chains*, pp. 53–93. Springer.
- Chambers J (2008). *Software for Data Analysis: Programming with R*. Statistics and computing. Springer-Verlag. ISBN 9780387759357.
- Ching WK, Huang X, Ng MK, Siu TK (2013). “Higher-order markov chains.” In *Markov Chains*, pp. 141–176. Springer.
- Ching WK, Ng MK, Fung ES (2008). “Higher-order multivariate Markov chains and their applications.” *Linear Algebra and its Applications*, **428**(2), 492–507.
- Csardi G, Nepusz T (2006). “The **igraph** Software Package for Complex Network Research.” *InterJournal, Complex Systems*, 1695. URL <http://igraph.sf.net>.
- De Angelis, Paolo, Di Falco, L (2016). *Assicurazioni sulla salute: caratteristiche, modelli attuariali e basi tecniche*. Il Mulino. Il Mulino. ISBN 9788815260840. URL <https://books.google.it/books?id=D56bjgEACAAJ>.
- de Wreede LC, Fiocco M, Putter H (2011). “**mstate**: An R Package for the Analysis of Competing Risks and Multi-State Models.” *Journal of Statistical Software*, **38**(7), 1–30. URL <http://www.jstatsoft.org/v38/i07/>.

- Denuit M, Maréchal X, Pitrebois S, Walhin JF (2007). *Actuarial modelling of claim counts: Risk classification, credibility and bonus-malus systems*. Wiley.
- Deshmukh S (2012). *Multiple Decrement Models in Insurance: An Introduction Using R*. SpringerLink : Bücher. Springer-Verlag. ISBN 9788132206590.
- Dobrow RP (2016). *Introduction to Stochastic Processes with R*. John Wiley & Sons.
- Eddelbuettel D (2013). *Seamless R and C++ Integration with **Rcpp***. Springer-Verlag, New York. ISBN 978-1-4614-6867-7.
- Feres R (2007). “Notes for Math 450 MATLAB Listings for Markov Chains.” URL <http://www.math.wustl.edu/~feres/Math450Lect04.pdf>.
- Geyer CJ, Johnson LT (2013). *mcmc: Markov Chain Monte Carlo*. R package version 0.9-2, URL <http://CRAN.R-project.org/package=mcmc>.
- Ghalanos A, Theussl S (2014). *Rsolnp: General Non-linear Optimization Using Augmented Lagrange Multiplier Method*. R package version 1.15.
- Glass D, Hall JR (1954). “Social Mobility in Great Britain: A Study in Intergenerational Change in Status.” In *Social Mobility in Great Britain*. Routledge and Kegan Paul.
- Goulet V, Dutang C, Maechler M, Firth D, Shapira M, Stadelmann M, expm-developers@listsR-forgeR-projectorg (2013). *expm: Matrix Exponential*. R package version 0.99-1, URL <http://CRAN.R-project.org/package=expm>.
- Himmelmann SSDDL, wwwlinhicom (2010). *HMM: HMM - Hidden Markov Models*. R package version 1.0, URL <http://CRAN.R-project.org/package=HMM>.
- Israel RB, Rosenthal JS, Wei JZ (2001). “Finding generators for Markov chains via empirical transition matrices, with applications to credit ratings.” *Mathematical finance*, **11**(2), 245–265.
- J G Kemeny, J L Snell, G L Thompson (1974). *Introduction to Finite Mathematics*. Prentice Hall.
- Jackson CH (2011). “Multi-State Models for Panel Data: The **msm** Package for R.” *Journal of Statistical Software*, **38**(8), 1–29. URL <http://www.jstatsoft.org/v38/i08/>.
- Jacob I (2014). “Is R Cost Effective?” Electronic. Presented on Manchester R Meeting, URL <http://www.rmanchester.org/Presentations/Ian%20Jacob%20-%20Is%20R%20Cost%20Effective.pdf>.
- Jo Blanden PG, Machin S (2005). “Intergenerational Mobility in Europe and North America.” *Technical report*, Center for Economic Performances. URL <http://cep.lse.ac.uk/about/news/IntergenerationalMobility.pdf>.
- Konstantopoulos T (2009). “Markov Chains and Random Walks.” *Lecture notes*.
- Kullback S, Kupperman M, Ku H (1962). “Tests for Contingency Tables and Markov Chains.” *Technometrics*, **4**(4), 573–608.

- Montgomery J (2009). “Communication Classes.” URL <http://www.ssc.wisc.edu/~jmontgom/commclasses.pdf>.
- Nicholson W (2013). *DTMCPack: Suite of Functions Related to Discrete-Time Discrete-State Markov Chains*. R package version 0.1-2, URL <http://CRAN.R-project.org/package=DTMCPack>.
- P J Avery, D A Henderson (1999). “Fitting Markov Chain Models to Discrete State Series.” *Applied Statistics*, **48**(1), 53–61.
- R Core Team (2013). *R: A Language and Environment for Statistical Computing*. R Foundation for Statistical Computing, Vienna, Austria. URL <http://www.R-project.org/>.
- Roebuck P (2011). *matlab: MATLAB emulation package*. R package version 0.8.9, URL <http://CRAN.R-project.org/package=matlab>.
- Sison CP, Glaz J (1995). “Simultaneous confidence intervals and sample size determination for multinomial proportions.” *Journal of the American Statistical Association*, **90**(429), 366–369.
- Skuriat-Olechnowska M (2005). *Statistical inference and hypothesis testing for Markov chains with Interval Censoring*. diploma thesis, Delft University of Technology.
- Snell L (1999). “Probability Book: chapter 11.” URL [http://www.dartmouth.edu/~chance/teaching\\_aids/books\\_articles/probability\\_book/Chapter11.pdf](http://www.dartmouth.edu/~chance/teaching_aids/books_articles/probability_book/Chapter11.pdf).
- Spedicato GA (2016). *markovchain: an R Package to Easily Handle Discrete Markov Chains*. R package version 0.4.
- Villacorta PJ (2012). *MultinomialCI: Simultaneous confidence intervals for multinomial proportions according to the method by Sison and Glaz*. R package version 1.0, URL <http://CRAN.R-project.org/package=MultinomialCI>.
- Wittmann A (2007). *CreditMetrics: Functions for Calculating the CreditMetrics Risk Model*. R package version 0.0-2.
- Wolfram Research I (2013a). URL <http://www.wolfram.com/mathematica/new-in-9/markov-chains-and-queues/structural-properties-of-finite-markov-processes.html>.
- Wolfram Research I (2013b). *Mathematica*. Wolfram Research, Inc., ninth edition.

### Affiliation:

Giorgio Alfredo Spedicato  
 Ph.D C.Stat ACAS  
 UnipolSai R&D  
 Via Firenze 11, Paderno Dugnano 20037 Italy  
 E-mail: [spedygiorgio@gmail.com](mailto:spedygiorgio@gmail.com)  
 URL: [www.statisticaladvisor.com](http://www.statisticaladvisor.com)

Tae Seung Kang  
Ph.D student  
Computer & Information Science & Engineering  
University of Florida  
Gainesville, FL, USA  
E-mail: [tskang3@gmail.com](mailto:tskang3@gmail.com)

Sai Bhargav Yalamanchi  
B-Tech student  
Electrical Engineering  
Indian Institute of Technology, Bombay  
Mumbai - 400 076, India  
E-mail: [bhargavcoolboy@gmail.com](mailto:bhargavcoolboy@gmail.com)

Deepak Yadav  
B-Tech student  
Computer Science and Engineering  
Indian Institute of Technology, Varanasi  
Uttar Pradesh - 221 005, India  
E-mail: [deepakyadav.iitbhu@gmail.com](mailto:deepakyadav.iitbhu@gmail.com)